


Luminaire		Measur.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	
Round Luminaire	Diam.	1000 mm	Height	1000 mm	
Round Luminous Area	Diam.	1000 mm	Height	10 mm	
Horizontal Luminous Area	0.785398 m2		Emitting area on Plane 180°	0.010000 m2	
Emitting area on Plane 0°	0.010000 m2		Emitting area on Plane 270°	0.010000 m2	
Emitting area on Plane 90°	0.010000 m2		Glare area at 76°	0.199708 m2	
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	2100.00 lm		
Operator	Asselum	Source voltage	230.00 V		
Temperature	20.00 °C	Source current			
Humidity	50.00 %	Photocell			
Notes					

Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- VIBIA	22 led 350mA 1W	22 led 350mA 1W	2100.00	22.00	1
C.I.E.	67 84 94 88 53	D DIN 5040	B51		
F UTE	0.47 C + 0.06 T	B NBN	BZ 1 / 0.8 / BZ 2 / 2 / BZ 3		


Diam=1000mm

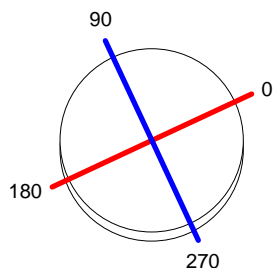

C Halfplanes

180.0 — 0.0
 270.0 — 90.0

ULOR 6.32 %
 DLOR 46.69 %
 RN 11.92 %

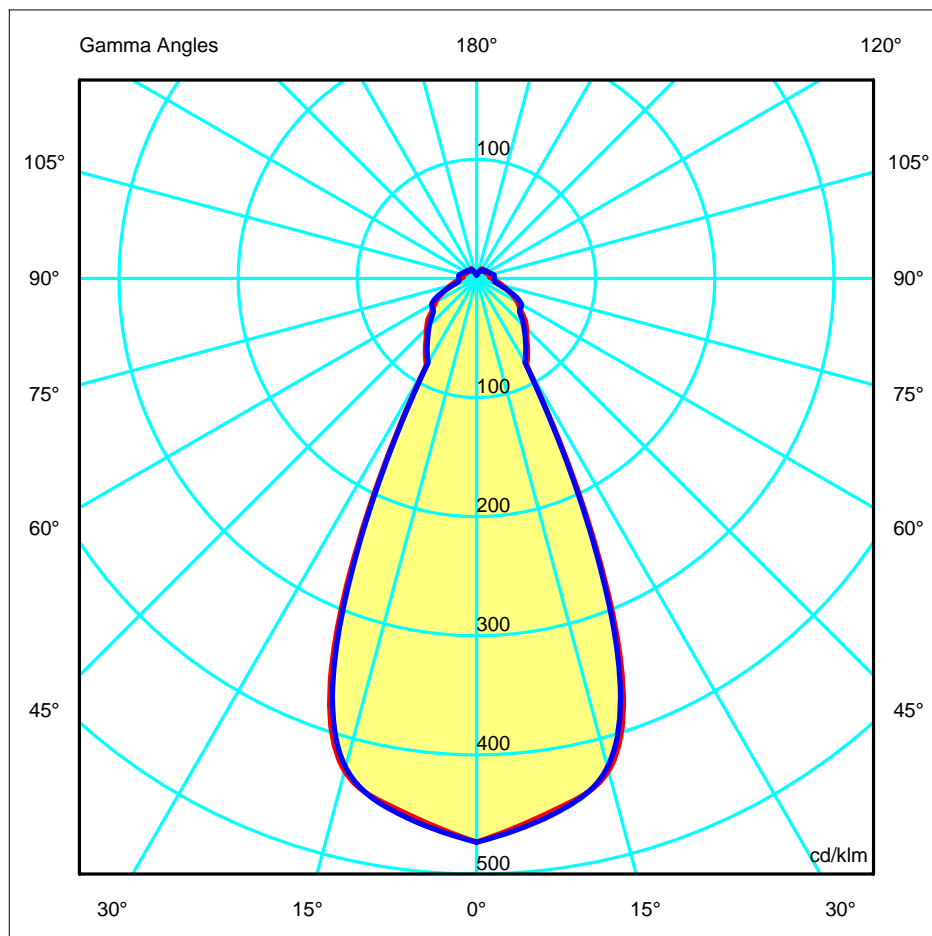

Luminaire		Measur.		Lamp						
Code	0940	Code	0940	Code	22 led 350mA 1W					
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1					
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal					
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm					
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical						
Luminous Intensity Table cd/klm Table 1/1										
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00
G 0.0	473.28	473.28	473.28	473.28	473.28	473.28	473.28	473.28	473.28	473.28
G 10.0	447.07	445.74	443.38	441.84	445.89	438.50	444.45	449.00	450.89	449.11
G 20.0	358.55	354.24	354.30	354.57	351.26	351.77	361.50	355.12	350.45	350.66
G 30.0	84.10	86.54	84.65	78.00	83.56	83.85	77.03	82.75	83.86	81.22
G 40.0	65.52	66.16	67.08	63.99	61.58	63.96	63.75	59.90	62.75	63.45
G 50.0	53.03	60.06	59.20	54.17	54.75	52.42	53.68	51.31	52.39	48.79
G 60.0	39.71	41.33	41.54	38.72	41.97	38.46	42.03	38.92	42.55	43.48
G 70.0	27.47	28.29	25.94	28.83	28.63	25.86	24.41	26.44	25.58	27.02
G 80.0	18.73	16.63	17.40	19.39	17.48	17.63	17.69	19.46	17.69	15.30
G 90.0	12.89	12.38	16.24	14.02	11.87	12.90	13.02	14.78	14.54	14.54
G100.0	11.00	10.66	10.21	10.99	9.90	12.27	10.44	12.20	11.71	15.14
G110.0	11.72	11.91	12.81	10.92	10.89	11.68	12.64	11.85	13.70	12.73
G120.0	9.14	9.81	8.92	11.23	11.68	12.11	10.61	9.22	11.89	11.18
G130.0	10.17	7.75	8.86	10.03	8.91	11.07	9.48	9.41	9.27	9.95
G140.0	9.02	9.22	7.46	9.07	7.73	8.13	8.06	9.16	8.37	8.11
G150.0	9.57	9.28	8.05	7.42	7.00	7.72	7.91	7.58	7.02	8.45
G160.0	5.48	5.34	5.28	5.57	6.18	6.58	5.54	4.81	5.54	6.07
G170.0	5.02	5.01	5.55	4.67	4.70	4.15	3.80	4.04	4.88	4.35
G180.0	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.88	2.88



Luminaire		Measur.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=1000mm

C Halfplanes


180.0 ————— 0.0

270.0 ————— 90.0

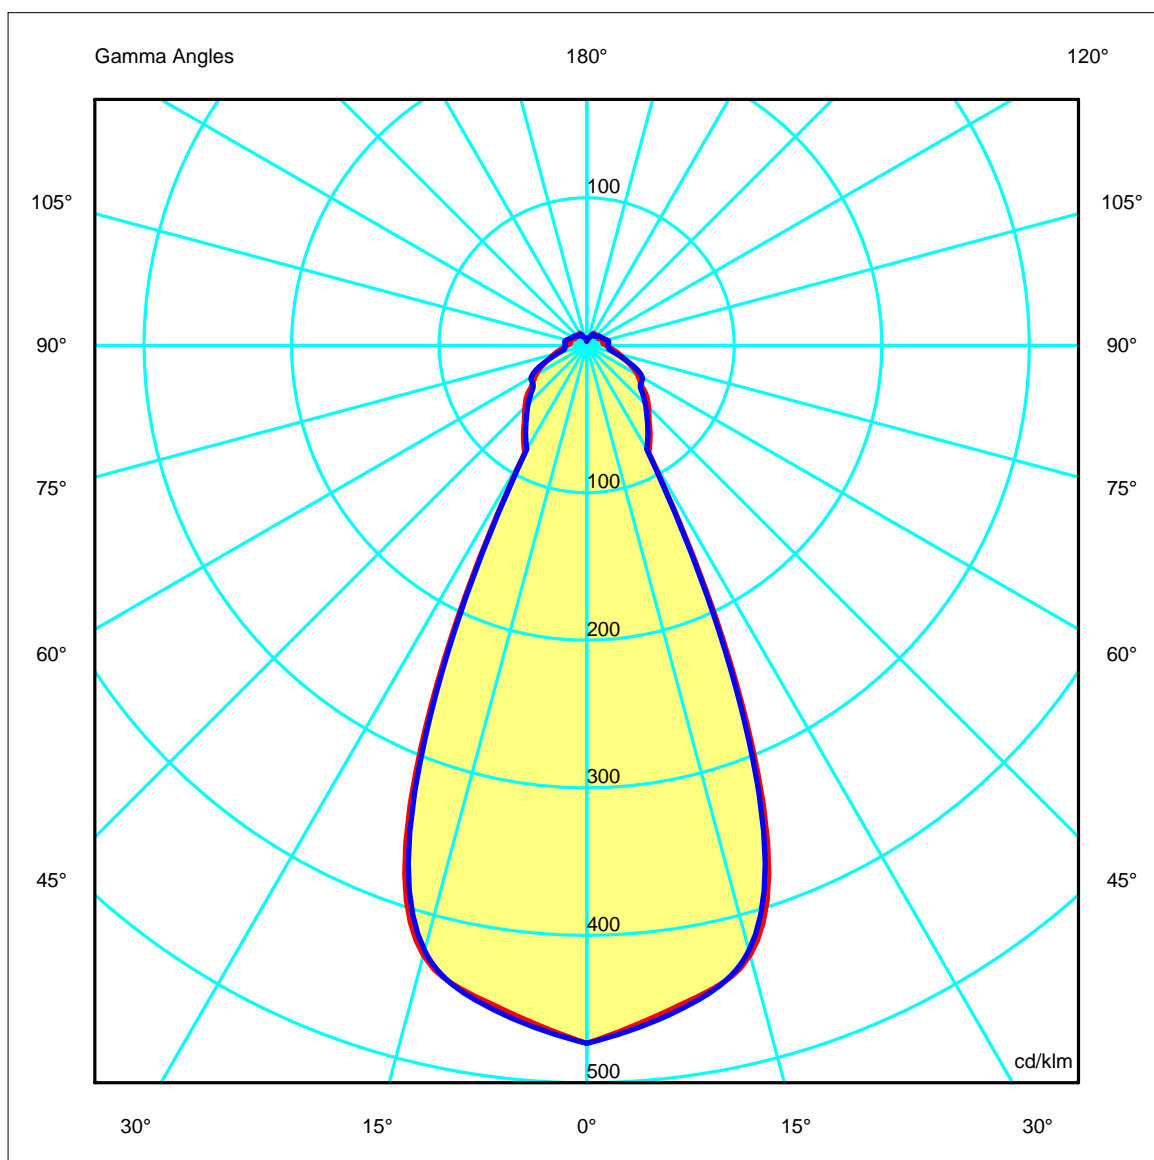


Luminaire		Measurem.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=1000mm

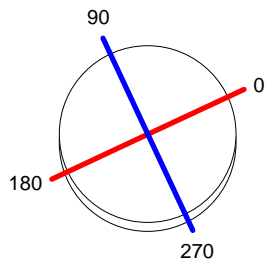

C Halfplanes

180.0 ————— 0.0
 270.0 ————— 90.0

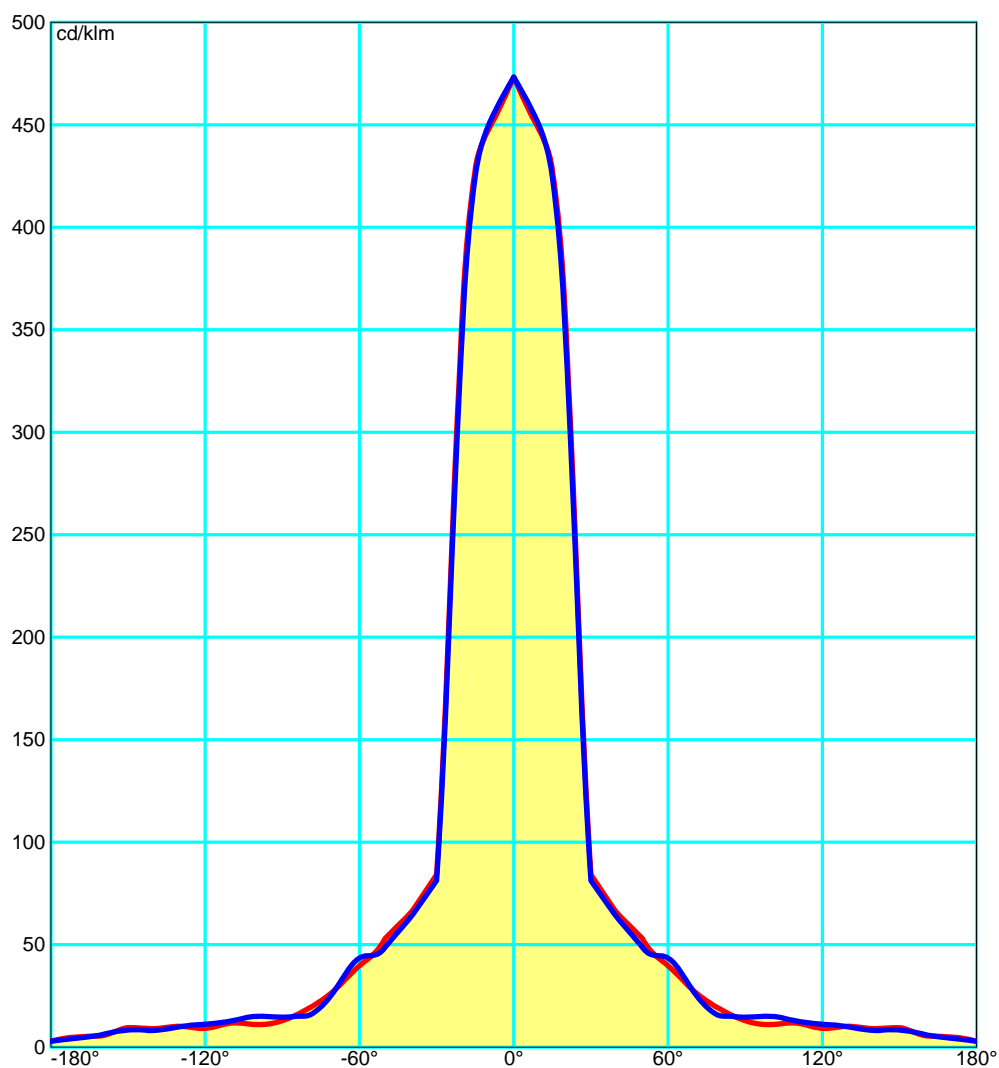

Luminaire		Measur.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions										
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	4.6	5.6	5.1	6.0	6.3	4.5	5.4	4.9	5.9	6.3
x=2H y=3H	6.4	7.3	6.9	7.7	8.0	6.2	7.1	6.7	7.5	8.0
x=2H y=4H	7.2	8.1	7.7	8.5	8.8	7.0	7.8	7.5	8.3	8.8
x=2H y=6H	8.1	8.9	8.6	9.4	9.6	7.8	8.6	8.3	9.1	9.6
x=2H y=8H	8.6	9.4	9.2	9.9	10.1	8.3	9.1	8.9	9.6	10.1
x=2H y=12H	9.2	9.9	9.7	10.4	10.8	9.0	9.7	9.5	10.2	10.8
x=4H y=2H	5.4	6.2	5.9	6.7	7.0	5.2	6.1	5.7	6.5	7.0
x=4H y=3H	7.4	8.1	7.9	8.6	8.9	7.1	7.8	7.7	8.3	8.9
x=4H y=4H	8.4	9.0	8.9	9.5	9.8	8.1	8.7	8.6	9.3	9.8
x=4H y=6H	9.4	9.9	10.0	10.5	10.9	9.2	9.7	9.8	10.3	10.9
x=4H y=8H	10.0	10.5	10.6	11.0	11.6	9.9	10.4	10.5	11.0	11.6
x=4H y=12H	10.6	11.1	11.2	11.7	12.4	10.6	11.1	11.3	11.7	12.4
x=8H y=4H	8.8	9.3	9.4	9.9	10.3	8.6	9.1	9.2	9.7	10.3
x=8H y=6H	10.1	10.5	10.8	11.1	11.7	10.0	10.4	10.6	11.0	11.7
x=8H y=8H	10.9	11.3	11.6	11.9	12.5	10.8	11.2	11.5	11.8	12.5
x=8H y=12H	11.8	12.1	12.5	12.8	13.6	11.9	12.2	12.6	12.8	13.6
x=12H y=4H	8.9	9.4	9.5	10.0	10.4	8.7	9.1	9.3	9.7	10.4
x=12H y=6H	10.3	10.7	11.0	11.3	11.8	10.2	10.5	10.8	11.1	11.8
x=12H y=8H	11.2	11.5	11.9	12.1	12.8	11.1	11.4	11.8	12.1	12.8

Luminaire		Measurem.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Total Flux=2100.00 Luminaire Flux=1113.27


RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.47	0.53	0.59	0.65	0.69	0.76	0.80	0.83	0.87	0.89	0.95	0.97
RC	2	2	3	3	3	3	3	3	3	3	3	2

		Zonal Flux per 1000 Lumen																	
Y°		10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)		44	157	258	304	350	393	426	450	467	481	493	504	513	520	525	528	530	530

CIE Flux Codes
67 84 94 88 53

C.I.E. 2/2/3/3/3/3/3/3/2
D DIN 5040 B51
F UTE 0.47 C + 0.06 T
B NBN BZ 1 / 0.8 / BZ 2 / 2 / BZ 3
RN 11.92308 %
BLF 1.0

LOR 53.01268 %
ULOR 6.32075 %
DLOR 46.69194 %
UFF 11.92308 %
DFF 88.07692 %
FFR 13.53713 %

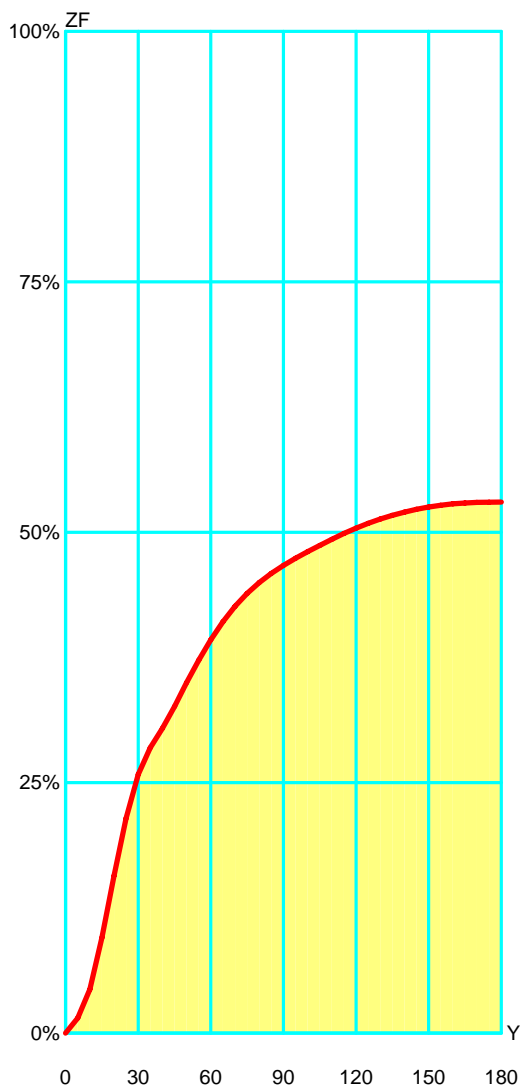


Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00%	0.00 %
5°	15.01	15.01	2.83 %	2.83 %
10°	28.83	43.84	5.44 %	8.27 %
15°	51.34	95.19	9.69 %	17.96 %
20°	61.97	157.16	11.69 %	29.65 %
25°	57.25	214.41	10.80 %	40.44 %
30°	43.83	258.24	8.27 %	48.71 %
35°	26.71	284.94	5.04 %	53.75 %
40°	19.24	304.18	3.63 %	57.38 %
45°	21.97	326.15	4.14 %	61.52 %
50°	23.75	349.90	4.48 %	66.00 %
55°	22.38	372.28	4.22 %	70.22 %
60°	20.28	392.56	3.83 %	74.05 %
65°	18.03	410.60	3.40 %	77.45 %
70°	15.52	426.11	2.93 %	80.38 %
75°	12.87	438.98	2.43 %	82.81 %
80°	10.73	449.71	2.02 %	84.83 %
85°	9.20	458.91	1.74 %	86.57 %
90°	8.01	466.92	1.51 %	88.08 %
95°	7.10	474.02	1.34 %	89.42 %
100°	6.54	480.55	1.23 %	90.65 %
105°	6.27	486.83	1.18 %	91.83 %
110°	6.08	492.90	1.15 %	92.98 %
115°	5.85	498.75	1.10 %	94.08 %
120°	5.42	504.17	1.02 %	95.10 %
125°	4.79	508.96	0.90 %	96.01 %
130°	4.20	513.16	0.79 %	96.80 %
135°	3.68	516.85	0.70 %	97.49 %
140°	3.23	520.07	0.61 %	98.10 %
145°	2.80	522.87	0.53 %	98.63 %
150°	2.32	525.19	0.44 %	99.07 %
155°	1.80	527.00	0.34 %	99.41 %
160°	1.32	528.32	0.25 %	99.66 %
165°	0.91	529.22	0.17 %	99.83 %
170°	0.54	529.77	0.10 %	99.93 %
175°	0.26	530.02	0.05 %	99.98 %
180°	0.10	530.13	0.02 %	100.00 %

Luminaire		Measur.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.45	0.90	1.35	1.81	2.26	OC	0.45	0.89	1.34	1.79	2.23
OB	0.45	0.90	1.35	1.81	2.26	OD	0.45	0.89	1.34	1.79	2.23

				Luminous Intensities [cd/klm]							
	0	5	15	25	35	45	55	65	75	85	
OA	993.89	965.15	898.61	450.63	157.10	124.48	94.14	70.72	47.40	32.44	
OB	993.89	965.15	898.61	450.63	157.10	124.48	94.14	70.72	47.40	32.44	
OC	993.89	970.71	891.68	436.75	151.90	117.85	93.91	76.87	41.06	31.33	
OD	993.89	970.71	891.68	436.75	151.90	117.85	93.91	76.87	41.06	31.33	

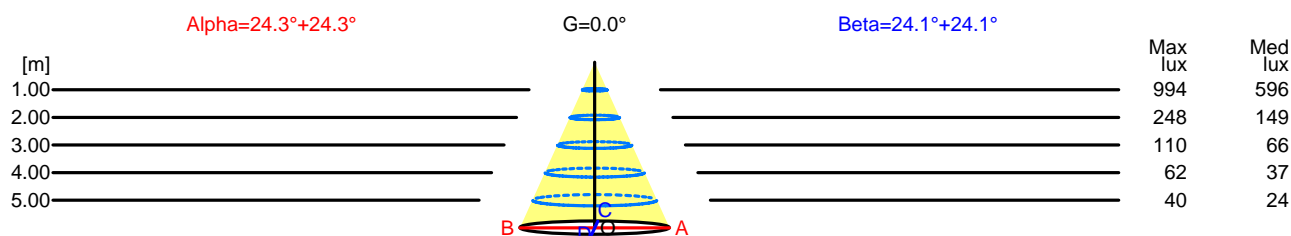


H[m]	D[m]	Max lux	Med lux	Alpha=24.3°+24.3°	G=0.0	
1.00	0.90	994	596			
2.00	1.81	248	149			
3.00	2.71	110	66			
4.00	3.61	62	37			
5.00	4.51	40	24			

H[m]	D[m]	Max lux	Med lux	Beta=24.1°+24.1°	G=0.0	
1.00	0.89	994	596			
2.00	1.79	248	149			
3.00	2.68	110	66			
4.00	3.57	62	37			
5.00	4.47	40	24			

Luminaire		Measurem.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

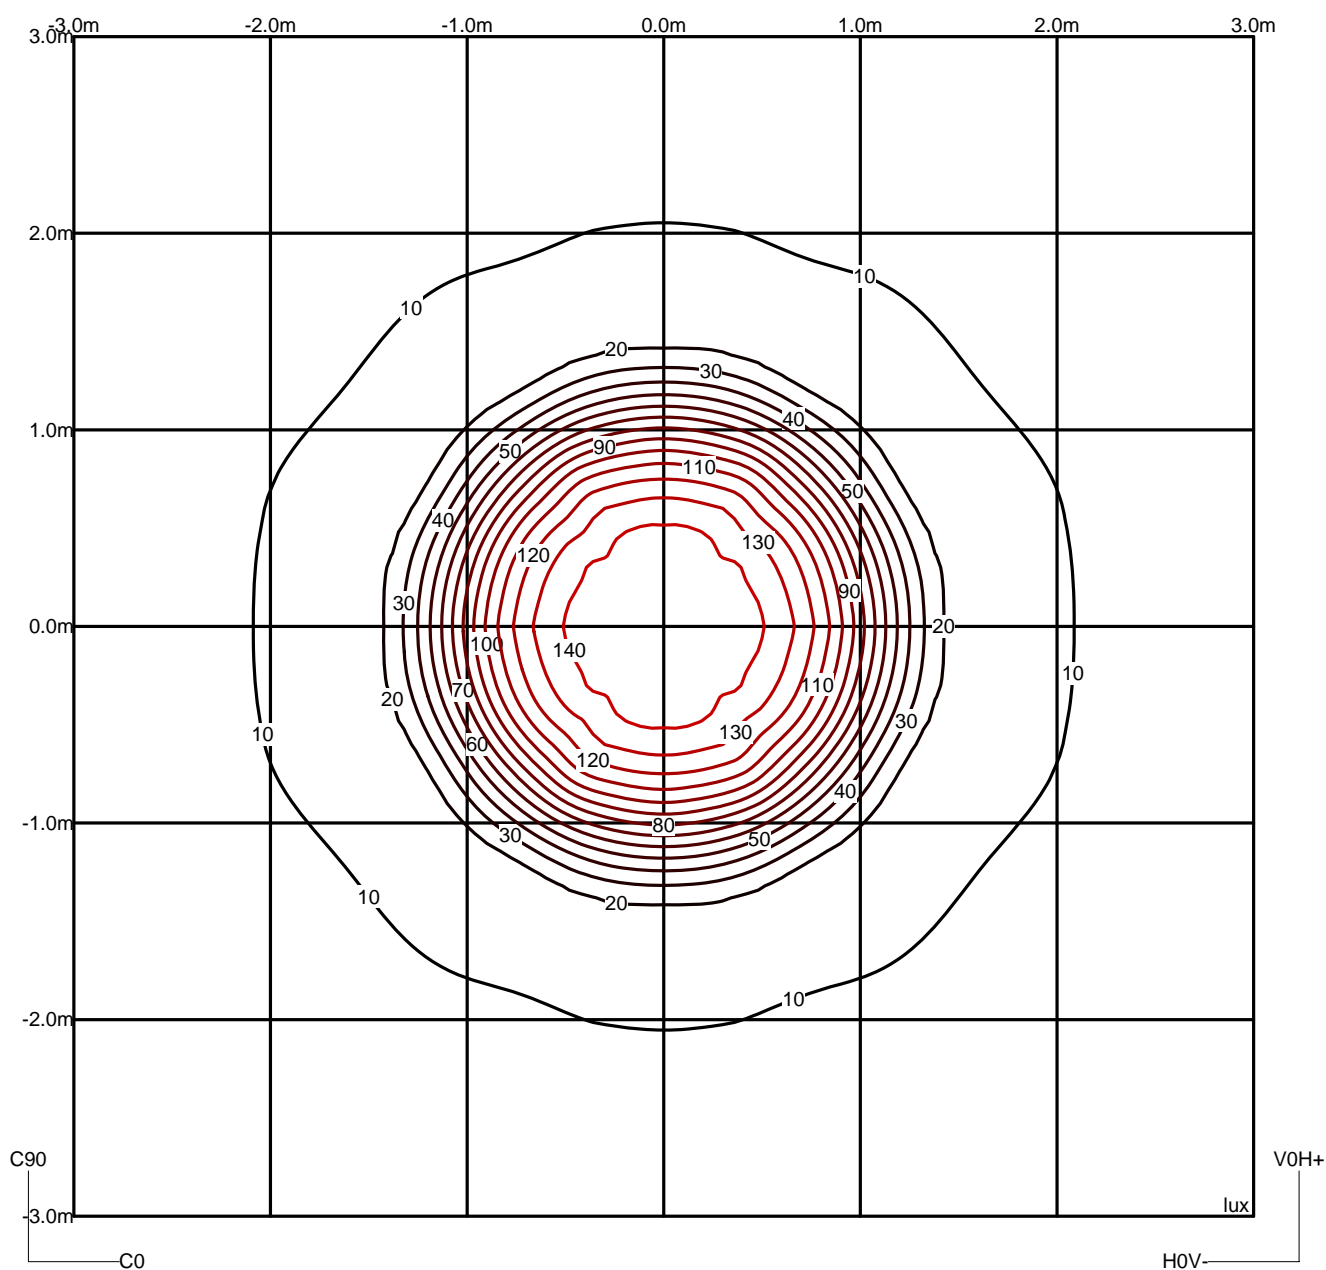

Luminaire				Measur.				Lamp			
Code	0940			Code	0940			Code	22 led 350mA 1W		
Name	Hanging lamp 22x100			Name	Hanging lamp 22x100			Number	1		
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal		
Efficiency	53.01%	Coordinate system				CG	Total Flux				2100.00 lm
Maximum value	473.28 cd/klm	Position				C=0.00 G=0.00	Double Symmetrical				


Utilizations CIE

Mounting	Direct				Normalization				Normalised				Suspension Ratio				Standard CIE Settings			
													</							

Luminaire		Measur.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	---
90.0°	221	217	205	208	207	207	223	269	414	---
	210	200	205	227	225	204	193	220	400	---

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

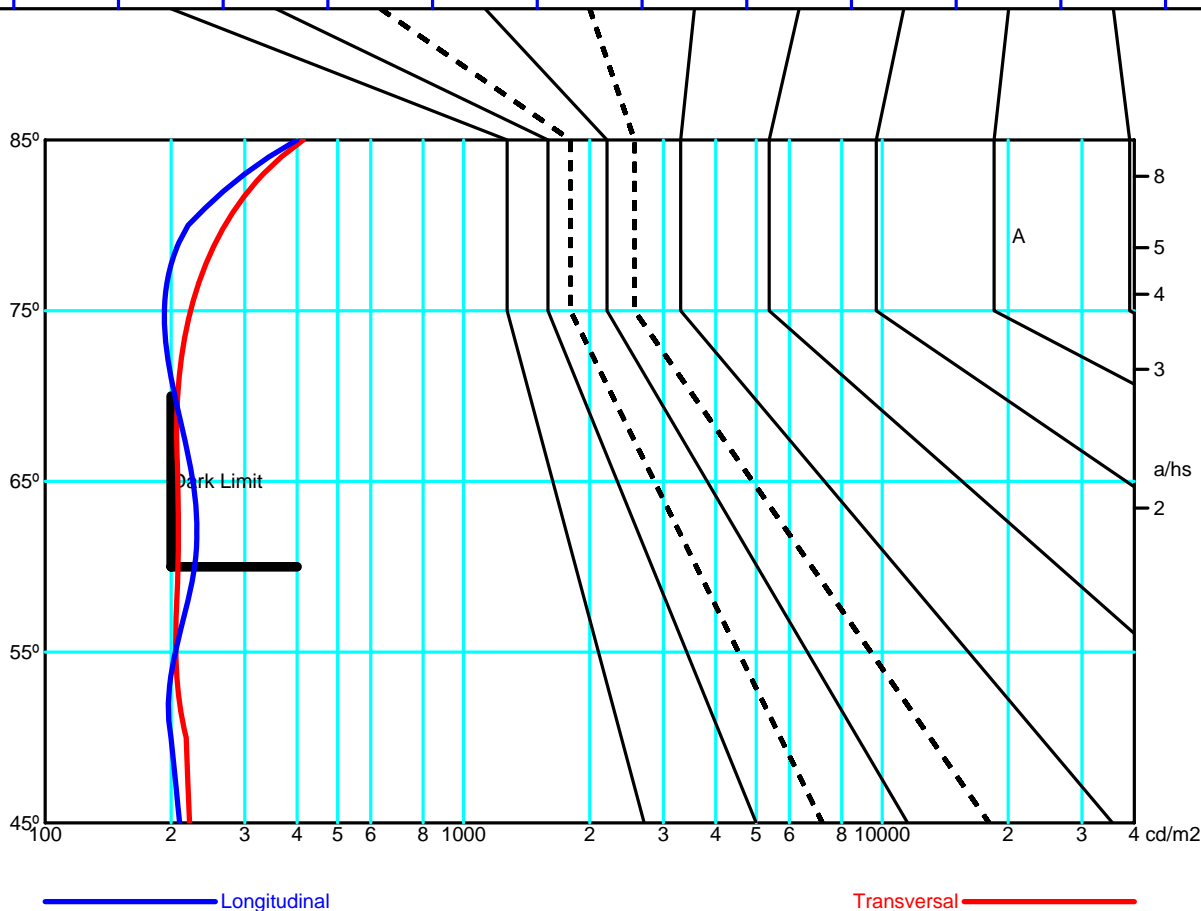

Luminaire		Measur.		Lamp	
Code	0940	Code	0940	Code	22 led 350mA 1W
Name	Hanging lamp 22x100	Name	Hanging lamp 22x100	Number	1
Line	VIBIA-Slim	Date	16-11-2012	Position	Universal
Efficiency	53.01%	Coordinate system	CG	Total Flux	2100.00 lm
Maximum value	473.28 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance

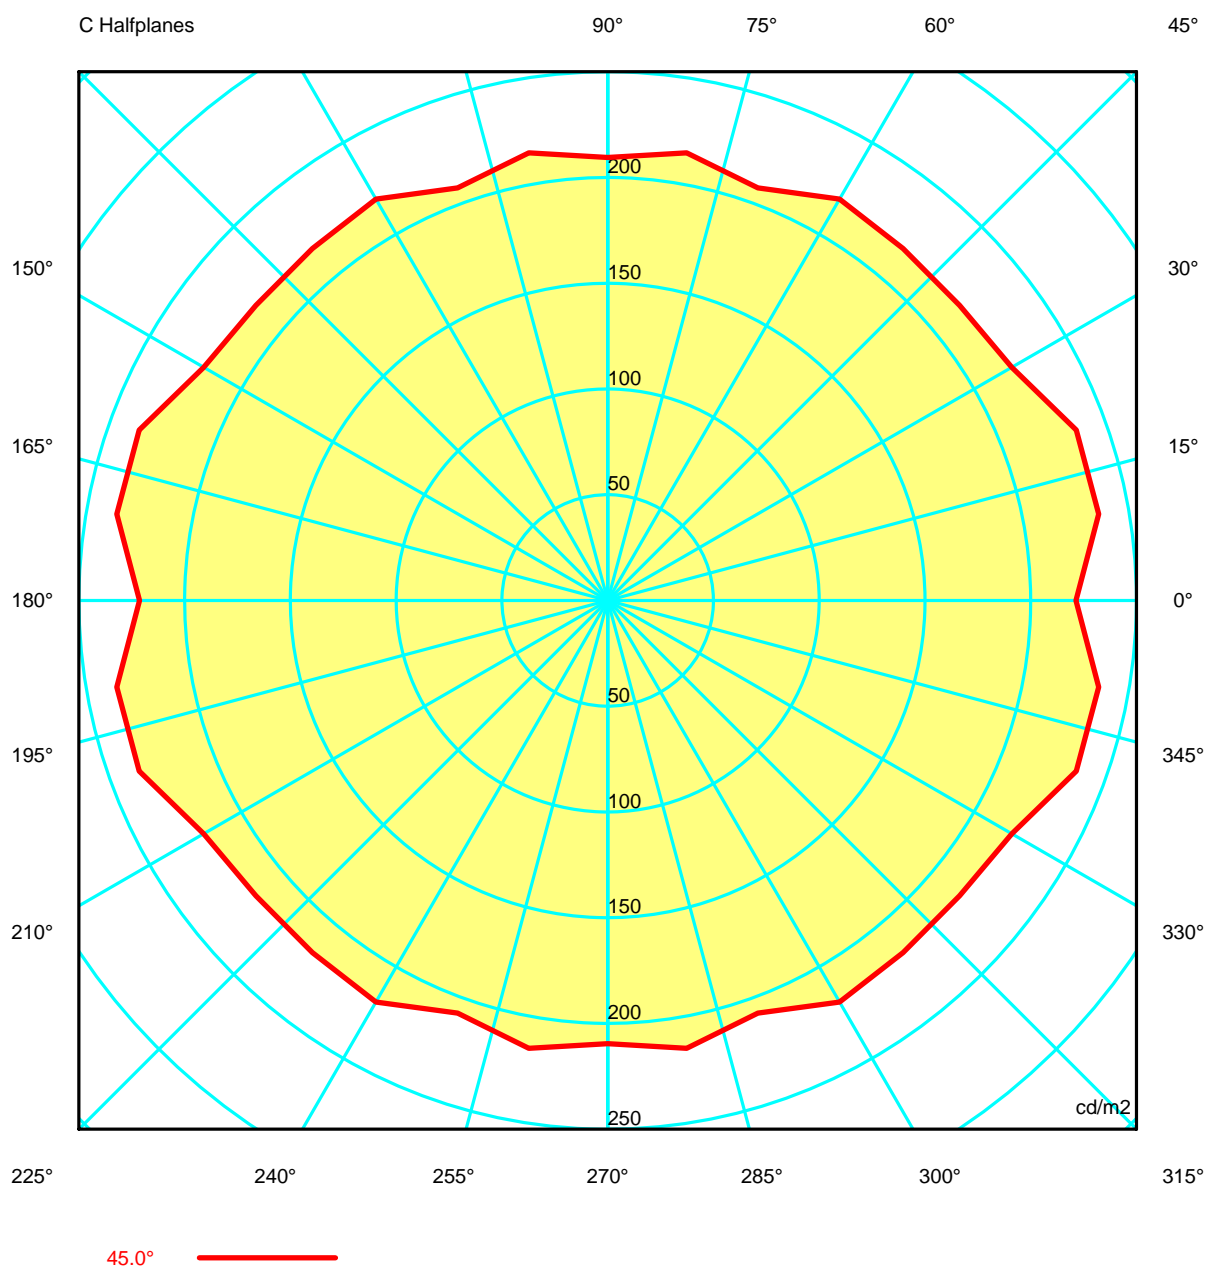

Luminaire				Measurem.				Lamp					
Code	0940			Code	0940			Code	22 led 350mA 1W				
Name	Hanging lamp 22x100			Name	Hanging lamp 22x100			Number	1				
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal				
Efficiency	53.01%			Coordinate system	CG			Total Flux	2100.00 lm				
Maximum value	473.28 cd/klm			Position	C=0.00 G=0.00			Double Symmetrical					
Luminance cd/m2 Table 1/3													
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46
G 5.0	1232.19	1231.78	1226.90	1223.06	1233.13	1218.43	1225.04	1237.45	1243.21	1239.28	1243.21	1237.45	1225.04
G 10.0	1211.09	1207.49	1201.11	1196.92	1207.91	1187.89	1204.00	1216.33	1221.45	1216.63	1221.45	1216.33	1204.00
G 15.0	1180.48	1170.17	1167.39	1167.62	1166.17	1155.65	1183.72	1177.72	1172.69	1171.38	1172.69	1177.72	1183.72
G 20.0	1015.51	1003.30	1003.48	1004.24	994.86	996.31	1023.87	1005.81	992.57	993.17	992.57	1005.81	1023.87
G 25.0	629.34	626.97	624.11	614.13	617.60	620.52	623.60	622.21	614.26	609.95	614.26	622.21	623.60
G 30.0	257.77	265.25	259.43	239.05	256.10	256.99	236.10	253.61	257.02	248.92	257.02	253.61	236.10
G 35.0	242.03	247.02	245.43	229.67	234.78	239.10	227.74	230.75	237.15	234.02	237.15	230.75	227.74
G 40.0	226.27	228.49	231.65	220.98	212.65	220.89	220.17	206.87	216.69	219.13	216.69	206.87	220.17
G 45.0	221.32	235.65	235.74	220.58	217.16	217.27	219.24	207.62	214.95	209.53	214.95	207.62	219.24
G 50.0	217.30	246.11	242.58	221.96	224.33	214.78	219.96	210.26	214.69	199.90	214.69	210.26	219.96
G 55.0	205.25	228.40	227.07	204.97	217.85	201.98	214.79	202.22	214.13	204.75	214.13	202.22	214.79
G 60.0	207.77	216.22	217.33	202.59	219.60	201.25	219.90	203.62	222.62	227.50	222.62	203.62	219.90
G 65.0	207.39	212.41	205.73	207.58	218.61	197.74	205.12	200.61	211.84	225.42	211.84	200.61	205.12
G 70.0	207.46	213.71	195.95	217.77	216.24	195.35	184.37	199.70	193.18	204.06	193.18	199.70	184.37
G 75.0	222.58	215.94	200.75	234.87	221.22	208.55	195.13	219.72	199.76	192.84	199.76	219.72	195.13
G 80.0	269.03	238.85	249.86	278.43	251.04	253.17	253.97	279.44	254.01	219.69	254.01	279.44	253.97
G 85.0	413.68	369.67	455.20	435.34	376.88	395.42	413.77	454.61	431.12	399.61	431.12	454.61	413.77
G 90.0	2706.21	2600.34	3409.91	2944.18	2492.93	2708.65	2734.98	3104.72	3054.36	3054.36	3054.36	3104.72	2734.98

Luminaire				Measurem.				Lamp					
Code	0940			Code	0940			Code	22 led 350mA 1W				
Name	Hanging lamp 22x100			Name	Hanging lamp 22x100			Number	1				
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal				
Efficiency	53.01%			Coordinate system	CG			Total Flux	2100.00 lm				
Maximum value	473.28 cd/klm			Position	C=0.00 G=0.00			Double Symmetrical					
Luminance cd/m2 Table 2/3													
	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46
G 5.0	1218.43	1233.13	1223.06	1226.90	1231.78	1232.19	1231.78	1226.90	1223.06	1233.13	1218.43	1225.04	1237.45
G 10.0	1187.89	1207.91	1196.92	1201.11	1207.49	1211.09	1207.49	1201.11	1196.92	1207.91	1187.89	1204.00	1216.33
G 15.0	1155.65	1166.17	1167.62	1167.39	1170.17	1180.48	1170.17	1167.39	1167.62	1166.17	1155.65	1183.72	1177.72
G 20.0	996.31	994.86	1004.24	1003.48	1003.30	1015.51	1003.30	1003.48	1004.24	994.86	996.31	1023.87	1005.81
G 25.0	620.52	617.60	614.13	624.11	626.97	629.34	626.97	624.11	614.13	617.60	620.52	623.60	622.21
G 30.0	256.99	256.10	239.05	259.43	265.25	257.77	265.25	259.43	239.05	256.10	256.99	236.10	253.61
G 35.0	239.10	234.78	229.67	245.43	247.02	242.03	247.02	245.43	229.67	234.78	239.10	227.74	230.75
G 40.0	220.89	212.65	220.98	231.65	228.49	226.27	228.49	231.65	220.98	212.65	220.89	220.17	206.87
G 45.0	217.27	217.16	220.58	235.74	235.65	221.32	235.65	235.74	220.58	217.16	217.27	219.24	207.62
G 50.0	214.78	224.33	221.96	242.58	246.11	217.30	246.11	242.58	221.96	224.33	214.78	219.96	210.26
G 55.0	201.98	217.85	204.97	227.07	228.40	205.25	228.40	227.07	204.97	217.85	201.98	214.79	202.22
G 60.0	201.25	219.60	202.59	217.33	216.22	207.77	216.22	217.33	202.59	219.60	201.25	219.90	203.62
G 65.0	197.74	218.61	207.58	205.73	212.41	207.39	212.41	205.73	207.58	218.61	197.74	205.12	200.61
G 70.0	195.35	216.24	217.77	195.95	213.71	207.46	213.71	195.95	217.77	216.24	195.35	184.37	199.70
G 75.0	208.55	221.22	234.87	200.75	215.94	222.58	215.94	200.75	234.87	221.22	208.55	195.13	219.72
G 80.0	253.17	251.04	278.43	249.86	238.85	269.03	238.85	249.86	278.43	251.04	253.17	253.97	279.44
G 85.0	395.42	376.88	435.34	455.20	369.67	413.68	369.67	455.20	435.34	376.88	395.42	413.77	454.61
G 90.0	2708.65	2492.93	2944.18	3409.91	2600.34	2706.21	2600.34	3409.91	2944.18	2492.93	2708.65	2734.98	3104.72

Luminaire				Measur.				Lamp			
Code	0940			Code	0940			Code	22 led 350mA 1W		
Name	Hanging lamp 22x100			Name	Hanging lamp 22x100			Number	1		
Line	VIBIA-Slim			Date	16-11-2012			Position	Universal		
Efficiency		53.01%		Coordinate system		CG		Total Flux		2100.00 lm	
Maximum value		473.28 cd/klm		Position		C=0.00 G=0.00		Double Symmetrical			
Luminance cd/m2 Table 3/3											
	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00	
G 0.0	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	1265.46	
G 5.0	1243.21	1239.28	1243.21	1237.45	1225.04	1218.43	1233.13	1223.06	1226.90	1231.78	
G 10.0	1221.45	1216.63	1221.45	1216.33	1204.00	1187.89	1207.91	1196.92	1201.11	1207.49	
G 15.0	1172.69	1171.38	1172.69	1177.72	1183.72	1155.65	1166.17	1167.62	1167.39	1170.17	
G 20.0	992.57	993.17	992.57	1005.81	1023.87	996.31	994.86	1004.24	1003.48	1003.30	
G 25.0	614.26	609.95	614.26	622.21	623.60	620.52	617.60	614.13	624.11	626.97	
G 30.0	257.02	248.92	257.02	253.61	236.10	256.99	256.10	239.05	259.43	265.25	
G 35.0	237.15	234.02	237.15	230.75	227.74	239.10	234.78	229.67	245.43	247.02	
G 40.0	216.69	219.13	216.69	206.87	220.17	220.89	212.65	220.98	231.65	228.49	
G 45.0	214.95	209.53	214.95	207.62	219.24	217.27	217.16	220.58	235.74	235.65	
G 50.0	214.69	199.90	214.69	210.26	219.96	214.78	224.33	221.96	242.58	246.11	
G 55.0	214.13	204.75	214.13	202.22	214.79	201.98	217.85	204.97	227.07	228.40	
G 60.0	222.62	227.50	222.62	203.62	219.90	201.25	219.60	202.59	217.33	216.22	
G 65.0	211.84	225.42	211.84	200.61	205.12	197.74	218.61	207.58	205.73	212.41	
G 70.0	193.18	204.06	193.18	199.70	184.37	195.35	216.24	217.77	195.95	213.71	
G 75.0	199.76	192.84	199.76	219.72	195.13	208.55	221.22	234.87	200.75	215.94	
G 80.0	254.01	219.69	254.01	279.44	253.97	253.17	251.04	278.43	249.86	238.85	
G 85.0	431.12	399.61	431.12	454.61	413.77	395.42	376.88	435.34	455.20	369.67	
G 90.0	3054.36	3054.36	3054.36	3104.72	2734.98	2708.65	2492.93	2944.18	3409.91	2600.34	