


Luminaire							
Code	5480						
Name	PUCK WALL ART LED						
Measur.							
Code							
Name	2700K CRI90						
Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG	Asymmetrical
Round Luminaire		Diam.	580 mm	Height	45 mm		
Round Luminous Area		Diam.	340 mm	Height	40 mm		
Horizontal Luminous Area		0.090792 m2		Emitting area on Plane 180°		0.013600 m2	
Emitting area on Plane 0°		0.013600 m2		Emitting area on Plane 270°		0.013600 m2	
Emitting area on Plane 90°		0.013600 m2		Glare area at 76°		0.035161 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		16-07-2019		Maximum Gamma Angle		180	
Measurement Distance		6.44		Measurement Flux		1366.61 lm	
Operator		ASSELUM		Rated Voltage			
Temperature		24.60 °C		Rated Current			
Humidity		52.90 %		Photocell		Prc	
Notes							
Luminaire Lamps							
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty		
PHILIPS LUMILED LUXEON 3014 250L	5751936 + 5751951	(1xLED 8,4W + 1xLED 12,6W) 700mA	1366.61	25.61	1		
C.I.E.	37 65 86 89 100	D DIN 5040	B21				
F UTE	0.89 H + 0.11 T	B NBN	BZ 6				

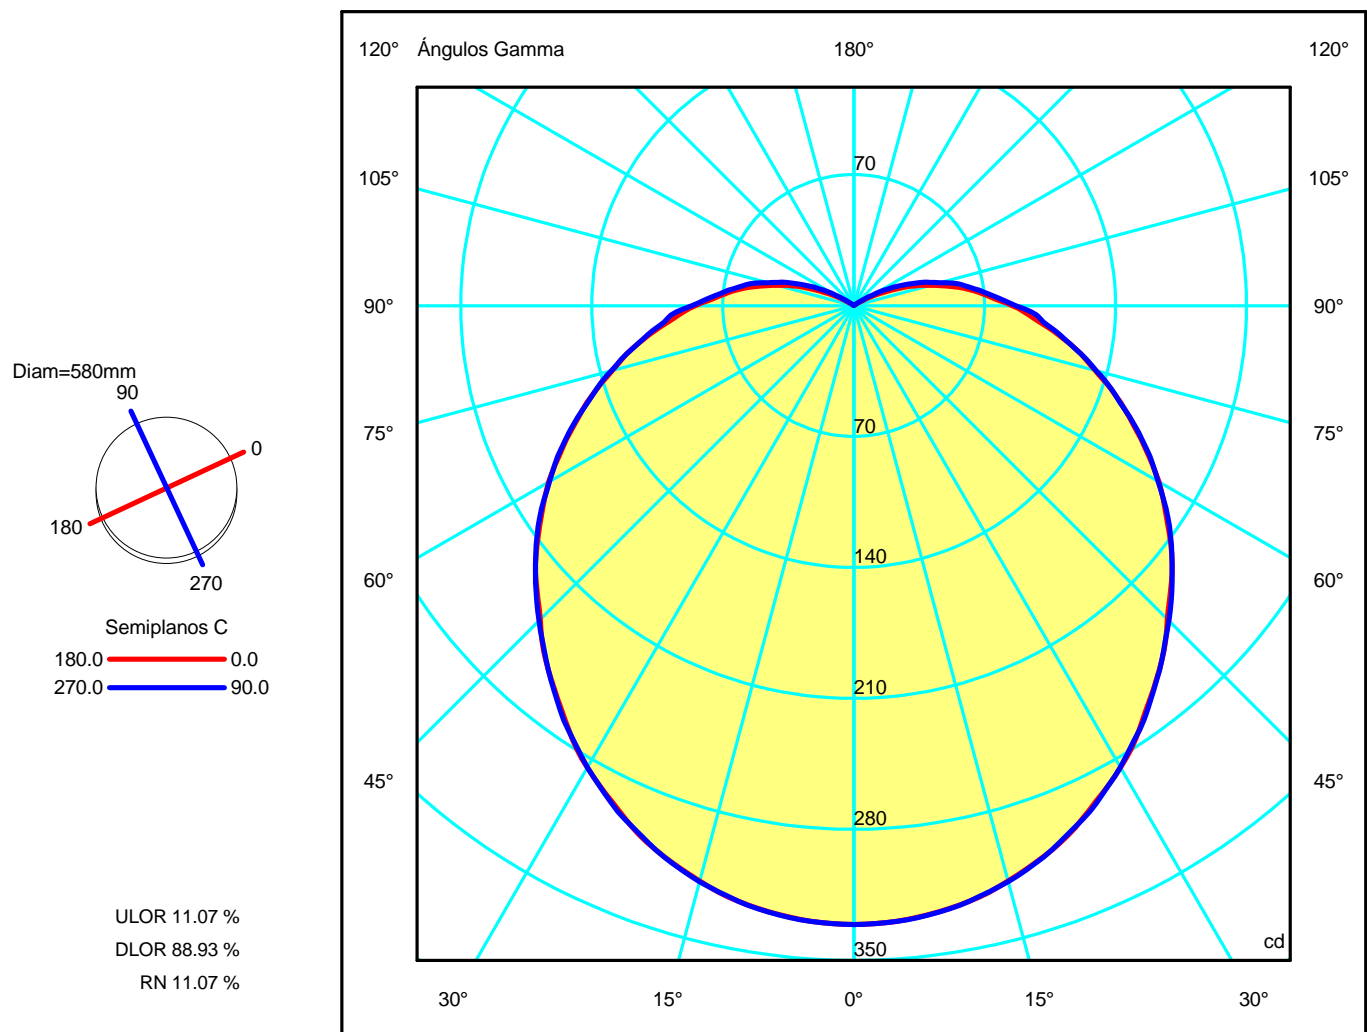

Luminaire
 Code 5480
 Name PUCK WALL ART LED
Measur.
 Code
 Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 1/18

	C 0.00	C 5.00	C 10.00	C 15.00	C 20.00	C 25.00	C 30.00	C 35.00	C 40.00	C 45.00	C 50.00	C 55.00	C 60.00
G 0.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 1.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 2.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 3.0	330	330	330	330	330	330	330	330	330	330	330	330	330
G 4.0	330	330	330	330	330	330	330	330	330	330	330	330	330
G 5.0	329	329	329	329	329	329	329	329	329	329	329	329	329
G 6.0	329	329	329	329	329	329	329	329	329	329	329	329	329
G 7.0	328	328	328	328	328	328	328	328	328	328	328	328	328
G 8.0	327	327	327	327	327	327	327	327	327	327	327	327	327
G 9.0	326	326	326	326	326	326	326	326	326	326	326	326	326
G 10.0	325	325	325	325	325	325	325	325	325	325	325	325	325
G 11.0	324	324	324	324	324	324	324	324	324	324	324	324	324
G 12.0	323	323	323	323	323	323	323	323	323	323	323	323	323
G 13.0	322	322	322	322	322	322	322	322	322	322	322	322	322
G 14.0	320	320	320	320	320	320	320	320	320	320	320	320	320
G 15.0	318	318	318	319	319	319	319	319	319	319	319	319	319
G 16.0	317	317	317	317	317	317	317	317	317	317	317	317	317
G 17.0	315	315	315	315	315	315	315	315	316	316	316	316	316
G 18.0	313	313	313	313	313	314	314	314	314	314	314	314	314
G 19.0	312	312	312	311	311	311	311	311	311	311	311	311	311
G 20.0	310	310	310	309	309	309	309	309	309	309	309	309	309
G 21.0	308	308	308	307	307	307	307	307	307	307	307	307	307
G 22.0	305	305	305	305	305	305	305	305	305	305	305	305	305
G 23.0	303	303	303	303	303	303	303	303	303	303	303	303	303
G 24.0	300	300	300	300	300	300	300	300	300	301	301	301	301
G 25.0	298	298	298	298	298	298	298	298	298	298	298	298	298
G 26.0	295	295	295	295	295	296	296	296	296	296	296	296	296
G 27.0	293	293	293	293	293	293	293	293	293	293	293	293	293
G 28.0	290	290	290	290	290	291	291	291	291	291	291	291	291
G 29.0	288	288	288	288	288	288	288	288	288	288	288	288	288
G 30.0	285	285	285	285	285	285	285	285	285	285	285	285	285
G 31.0	282	282	282	282	282	282	282	282	282	282	282	282	282
G 32.0	280	280	279	279	279	279	279	279	279	279	279	279	279
G 33.0	276	276	276	276	276	276	276	276	276	276	276	276	276
G 34.0	273	273	273	273	273	273	273	273	273	273	273	273	273
G 35.0	270	270	270	270	270	270	270	270	270	270	270	270	270
G 36.0	266	266	266	267	267	267	267	267	267	267	267	267	267
G 37.0	263	263	263	264	264	264	264	264	264	264	264	264	264
G 38.0	260	260	260	260	260	261	261	261	261	261	261	261	261
G 39.0	257	257	257	257	257	257	257	257	257	257	257	257	257
G 40.0	254	254	254	254	254	254	253	253	253	253	253	253	254
G 41.0	251	251	251	251	251	250	250	250	250	250	250	250	250
G 42.0	248	248	248	248	248	247	247	247	247	247	247	247	247
G 43.0	244	244	244	244	244	244	244	244	244	244	244	244	244
G 44.0	241	241	241	241	241	241	241	241	241	241	241	241	241
G 45.0	237	237	237	237	237	238	238	238	238	238	238	238	238
G 46.0	234	234	234	234	234	234	234	235	235	235	235	235	235
G 47.0	231	231	231	231	231	231	231	231	232	232	232	232	232
G 48.0	228	228	228	228	228	228	228	228	228	228	228	228	228
G 49.0	225	225	225	225	225	225	225	225	225	225	225	225	225
G 50.0	222	222	222	222	222	222	221	221	221	221	221	221	222
G 51.0	219	219	219	219	219	218	218	218	218	218	218	218	218
G 52.0	216	216	215	215	215	215	215	215	215	215	215	215	215
G 53.0	212	212	212	212	212	212	212	212	212	212	212	212	212
G 54.0	209	209	209	209	209	209	209	209	209	209	209	209	209
G 55.0	205	205	205	205	205	205	206	206	206	206	206	206	206
G 56.0	202	202	202	202	202	202	202	202	202	202	202	202	202
G 57.0	198	198	198	198	198	198	199	199	199	199	199	199	199
G 58.0	195	195	195	195	195	195	195	195	195	195	195	195	195
G 59.0	192	192	192	192	191	191	191	191	191	191	191	191	191
G 60.0	188	188	188	188	188	188	188	188	188	188	188	188	188
G 61.0	185	185	184	184	184	184	184	184	184	184	184	184	184
G 62.0	181	181	181	181	180	180	180	180	180	180	180	180	181
G 63.0	177	177	177	177	177	177	177	177	177	177	177	177	177
G 64.0	173	173	173	173	173	173	173	173	173	173	173	174	174
G 65.0	170	170	170	170	170	170	170	170	170	170	170	170	170
G 66.0	166	166	166	166	166	166	166	166	166	166	166	166	166
G 67.0	162	162	162	162	162	162	162	162	162	162	162	162	162
G 68.0	159	159	159	158	158	158	158	158	158	158	158	158	158
G 69.0	155	155	155	155	155	155	155	155	155	154	154	155	155
G 70.0	152	152	152	151	151	151	151	151	151	151	151	151	151
G 71.0	148	148	148	148	148	148	148	147	147	147	147	147	147
G 72.0	145	145	144	144	144	144	144	144	144	144	144	144	144

Luminaire
 Code 5480
 Name PUCK WALL ART LED
Measur.
 Code
 Name 2700K CRI90

Luminaire Flux	1366.61 lm		Luminaire Power		25.61 W		Efficacy		53.37 lm/W		Efficiency		100.00%	
Sources Flux	1366.61 lm		Maximum value		330.80 cd		Position		C=0.00 G=0.00		CG Asymmetrical			
Luminous Intensity Table cd Table 2/18														
	C 65.00	C 70.00	C 75.00	C 80.00	C 85.00	C 90.00	C 95.00	C 100.00	C 105.00	C 110.00	C 115.00	C 120.00	C 125.00	
G 0.0	331	331	331	331	331	331	331	331	331	331	331	331	331	331
G 1.0	331	331	331	331	331	331	331	331	331	331	331	331	331	331
G 2.0	331	331	331	331	331	331	331	331	331	331	331	331	331	331
G 3.0	330	330	330	330	330	330	330	330	330	330	330	330	330	330
G 4.0	330	330	330	330	330	330	330	330	330	330	330	330	330	330
G 5.0	329	329	329	329	329	329	329	329	329	329	329	329	329	329
G 6.0	329	329	329	329	329	329	329	329	329	329	329	329	329	329
G 7.0	328	328	328	328	328	328	328	328	328	328	328	328	328	328
G 8.0	327	327	327	327	327	327	327	327	327	327	327	327	327	327
G 9.0	326	326	326	326	326	326	326	326	326	326	326	326	326	326
G 10.0	325	325	325	325	325	325	325	325	325	325	325	325	325	325
G 11.0	324	324	324	324	324	324	324	324	324	324	324	324	324	324
G 12.0	323	323	323	323	323	323	323	323	323	323	323	323	323	323
G 13.0	322	322	322	322	322	322	322	322	322	322	322	322	322	322
G 14.0	320	320	320	320	320	320	320	320	320	320	320	320	320	320
G 15.0	319	319	319	319	319	319	319	319	319	319	319	319	319	319
G 16.0	317	317	317	317	317	317	317	317	317	317	317	317	317	317
G 17.0	316	316	315	315	315	315	315	315	315	316	316	316	316	316
G 18.0	314	314	314	314	314	314	314	314	314	314	314	314	314	314
G 19.0	311	312	312	312	312	312	312	312	312	312	311	311	311	311
G 20.0	309	309	309	309	310	310	310	309	309	309	309	309	309	309
G 21.0	307	307	307	307	307	307	307	307	307	307	307	307	307	307
G 22.0	305	305	305	305	305	305	305	305	305	305	305	305	305	305
G 23.0	303	303	303	303	303	303	303	303	303	303	303	303	303	303
G 24.0	301	301	301	301	301	301	301	301	301	301	301	301	301	301
G 25.0	298	298	298	298	298	298	298	298	298	298	298	298	298	298
G 26.0	296	296	296	296	296	296	296	296	296	296	296	296	296	296
G 27.0	293	293	293	293	293	293	293	293	293	293	293	293	293	293
G 28.0	291	291	290	290	290	290	290	290	290	291	291	291	291	291
G 29.0	288	288	288	288	288	288	288	288	288	288	288	288	288	288
G 30.0	285	285	285	285	285	285	285	285	285	285	285	285	285	285
G 31.0	282	282	282	282	282	282	282	282	282	282	282	282	282	282
G 32.0	279	279	279	279	279	279	279	279	279	279	279	279	279	279
G 33.0	276	276	276	276	276	276	276	276	276	276	276	276	276	276
G 34.0	273	273	273	273	273	273	273	273	273	273	273	273	273	273
G 35.0	270	270	270	270	270	270	270	270	270	270	270	270	270	270
G 36.0	267	267	267	267	267	267	267	267	267	267	267	267	267	267
G 37.0	264	264	264	264	264	264	264	264	264	264	264	264	264	264
G 38.0	261	261	261	261	261	260	261	261	261	261	261	261	261	261
G 39.0	257	257	257	257	257	257	257	257	257	257	257	257	257	257
G 40.0	254	254	254	254	254	254	254	254	254	254	254	254	254	253
G 41.0	250	250	251	251	251	251	251	251	251	250	250	250	250	250
G 42.0	247	247	247	247	247	248	247	247	247	247	247	247	247	247
G 43.0	244	244	244	244	244	244	244	244	244	244	244	244	244	244
G 44.0	241	241	241	241	241	241	241	241	241	241	241	241	241	241
G 45.0	238	238	238	238	238	238	238	238	238	238	238	238	238	238
G 46.0	235	235	235	235	235	235	235	235	235	235	235	235	235	235
G 47.0	232	232	232	232	232	232	232	232	232	232	232	232	232	232
G 48.0	228	228	229	229	229	229	229	229	229	228	228	228	228	228
G 49.0	225	225	225	225	225	225	225	225	225	225	225	225	225	225
G 50.0	222	222	222	222	222	222	222	222	222	222	222	222	222	221
G 51.0	218	219	219	219	219	219	219	219	219	219	218	218	218	218
G 52.0	215	215	216	216	216	216	216	216	216	215	215	215	215	215
G 53.0	212	212	212	212	213	213	213	212	212	212	212	212	212	212
G 54.0	209	209	209	209	209	209	209	209	209	209	209	209	209	209
G 55.0	206	206	206	206	206	206	206	206	206	206	206	206	206	206
G 56.0	202	202	202	203	203	203	203	203	202	202	202	202	202	202
G 57.0	199	199	199	199	199	199	199	199	199	199	199	199	199	199
G 58.0	195	195	195	195	195	195	195	195	195	195	195	195	195	195
G 59.0	191	191	191	191	191	191	191	191	191	191	191	191	191	191
G 60.0	188	188	188	188	188	188	188	188	188	188	188	188	188	188
G 61.0	184	184	184	184	184	184	184	184	184	184	184	184	184	184
G 62.0	181	181	181	181	181	181	181	181	181	181	181	181	181	180
G 63.0	177	177	177	177	178	178	178	177	177	177	177	177	177	177
G 64.0	174	174	174	174	174	174	174	174	174	174	174	174	174	174
G 65.0	170	170	170	170	170	170	170	170	170	170	170	170	170	170
G 66.0	166	166	166	166	167	167	167	166	166	166	166	166	166	166
G 67.0	162	163	163	163	163	163	163	163	163	163	162	162	162	162
G 68.0	159	159	159	159	159	159	159	159	159	159	159	158	158	158
G 69.0	155	155	155	155	155	155	155	155	155	155	155	155	155	155
G 70.0	151	151	151	151	151	151	151	151	151	151	151	151	151	151
G 71.0	147	148	148	148	148	148	148	148	148	148	147	147	147	147
G 72.0	144	144	144	145	145	145	145	145	144	144	144	144	144	144

Luminaire
Code 5480
Name PUCK WALL ART LED
Measur.
Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 3/18

	C 130.00	C 135.00	C 140.00	C 145.00	C 150.00	C 155.00	C 160.00	C 165.00	C 170.00	C 175.00	C 180.00	C 185.00	C 190.00
G 0.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 1.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 2.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 3.0	330	330	330	330	330	330	330	330	330	330	330	330	330
G 4.0	330	330	330	330	330	330	330	330	330	330	330	330	330
G 5.0	329	329	329	329	329	329	329	329	329	329	329	329	329
G 6.0	329	329	329	329	329	329	329	329	329	329	329	329	329
G 7.0	328	328	328	328	328	328	328	328	328	328	328	328	328
G 8.0	327	327	327	327	327	327	327	327	327	327	327	327	327
G 9.0	326	326	326	326	326	326	326	326	326	326	326	326	326
G 10.0	325	325	325	325	325	325	325	325	325	325	325	325	325
G 11.0	324	324	324	324	324	324	324	324	324	324	324	324	324
G 12.0	323	323	323	323	323	323	323	323	323	323	323	323	323
G 13.0	322	322	322	322	322	322	322	322	322	322	322	322	322
G 14.0	320	320	320	320	320	320	320	320	320	320	320	320	320
G 15.0	319	319	319	319	319	319	319	319	318	318	318	318	318
G 16.0	317	317	317	317	317	317	317	317	317	317	317	317	317
G 17.0	316	316	316	315	315	315	315	315	315	315	315	315	315
G 18.0	314	314	314	314	314	314	313	313	313	313	313	313	313
G 19.0	311	311	311	311	311	311	311	311	312	312	312	312	312
G 20.0	309	309	309	309	309	309	309	309	310	310	310	310	310
G 21.0	307	307	307	307	307	307	307	307	308	308	308	308	308
G 22.0	305	305	305	305	305	305	305	305	305	305	305	305	305
G 23.0	303	303	303	303	303	303	303	303	303	303	303	303	303
G 24.0	301	301	300	300	300	300	300	300	300	300	300	300	300
G 25.0	298	298	298	298	298	298	298	298	298	298	298	298	298
G 26.0	296	296	296	296	296	296	295	295	295	295	295	295	295
G 27.0	293	293	293	293	293	293	293	293	293	293	293	293	293
G 28.0	291	291	291	291	291	291	290	290	290	290	290	290	290
G 29.0	288	288	288	288	288	288	288	288	288	288	288	288	288
G 30.0	285	285	285	285	285	285	285	285	285	285	285	285	285
G 31.0	282	282	282	282	282	282	282	282	282	282	282	282	282
G 32.0	279	279	279	279	279	279	279	279	279	280	280	280	279
G 33.0	276	276	276	276	276	276	276	276	276	276	276	276	276
G 34.0	273	273	273	273	273	273	273	273	273	273	273	273	273
G 35.0	270	270	270	270	270	270	270	270	270	270	270	270	270
G 36.0	267	267	267	267	267	267	267	267	266	266	266	266	266
G 37.0	264	264	264	264	264	264	264	264	263	263	263	263	263
G 38.0	261	261	261	261	261	261	260	260	260	260	260	260	260
G 39.0	257	257	257	257	257	257	257	257	257	257	257	257	257
G 40.0	253	253	253	253	253	254	254	254	254	254	254	254	254
G 41.0	250	250	250	250	250	250	251	251	251	251	251	251	251
G 42.0	247	247	247	247	247	247	248	248	248	248	248	248	248
G 43.0	244	244	244	244	244	244	244	244	244	244	244	244	244
G 44.0	241	241	241	241	241	241	241	241	241	241	241	241	241
G 45.0	238	238	238	238	238	238	237	237	237	237	237	237	237
G 46.0	235	235	235	235	234	234	234	234	234	234	234	234	234
G 47.0	232	232	232	231	231	231	231	231	231	231	231	231	231
G 48.0	228	228	228	228	228	228	228	228	228	228	228	228	228
G 49.0	225	225	225	225	225	225	225	225	225	225	225	225	225
G 50.0	221	221	221	221	221	222	222	222	222	222	222	222	222
G 51.0	218	218	218	218	218	218	219	219	219	219	219	219	219
G 52.0	215	215	215	215	215	215	215	215	215	216	216	216	215
G 53.0	212	212	212	212	212	212	212	212	212	212	212	212	212
G 54.0	209	209	209	209	209	209	209	209	209	209	209	209	209
G 55.0	206	206	206	206	206	205	205	205	205	205	205	205	205
G 56.0	202	202	202	202	202	202	202	202	202	202	202	202	202
G 57.0	199	199	199	199	199	198	198	198	198	198	198	198	198
G 58.0	195	195	195	195	195	195	195	195	195	195	195	195	195
G 59.0	191	191	191	191	191	191	191	192	192	192	192	192	192
G 60.0	188	188	188	188	188	188	188	188	188	188	188	188	188
G 61.0	184	184	184	184	184	184	184	184	185	185	185	185	184
G 62.0	180	180	180	180	180	180	180	181	181	181	181	181	181
G 63.0	177	177	177	177	177	177	177	177	177	177	177	177	177
G 64.0	173	173	173	173	173	173	173	173	173	173	173	173	173
G 65.0	170	170	170	170	170	170	170	170	170	170	170	170	170
G 66.0	166	166	166	166	166	166	166	166	166	166	166	166	166
G 67.0	162	162	162	162	162	162	162	162	162	162	162	162	162
G 68.0	158	158	158	158	158	158	158	158	159	159	159	159	159
G 69.0	154	154	155	155	155	155	155	155	155	155	155	155	155
G 70.0	151	151	151	151	151	151	151	151	152	152	152	152	152
G 71.0	147	147	147	147	148	148	148	148	148	148	148	148	148
G 72.0	144	144	144	144	144	144	144	144	144	145	145	145	144

Luminaire
 Code 5480
 Name PUCK WALL ART LED
Measur.
 Code
 Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 4/18

	C 195.00	C 200.00	C 205.00	C 210.00	C 215.00	C 220.00	C 225.00	C 230.00	C 235.00	C 240.00	C 245.00	C 250.00	C 255.00
G 0.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 1.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 2.0	331	331	331	331	331	331	331	331	331	331	331	331	331
G 3.0	330	330	330	330	330	330	330	330	330	330	330	330	330
G 4.0	330	330	330	330	330	330	330	330	330	330	330	330	330
G 5.0	329	329	329	329	329	329	329	329	329	329	329	329	329
G 6.0	329	329	329	329	329	329	329	329	329	329	329	329	329
G 7.0	328	328	328	328	328	328	328	328	328	328	328	328	328
G 8.0	327	327	327	327	327	327	327	327	327	327	327	327	327
G 9.0	326	326	326	326	326	326	326	326	326	326	326	326	326
G 10.0	325	325	325	325	325	325	325	325	325	325	325	325	325
G 11.0	324	324	324	324	324	324	324	324	324	324	324	324	324
G 12.0	323	323	323	323	323	323	323	323	323	323	323	323	323
G 13.0	322	322	322	322	322	322	322	322	322	322	322	322	322
G 14.0	320	320	320	320	320	320	320	320	320	320	320	320	320
G 15.0	319	319	319	319	319	319	319	319	319	319	319	319	319
G 16.0	317	317	317	317	317	317	317	317	317	317	317	317	317
G 17.0	315	315	315	315	315	316	316	316	316	316	316	316	315
G 18.0	313	313	314	314	314	314	314	314	314	314	314	314	314
G 19.0	311	311	311	311	311	311	311	311	311	311	311	312	312
G 20.0	309	309	309	309	309	309	309	309	309	309	309	309	309
G 21.0	307	307	307	307	307	307	307	307	307	307	307	307	307
G 22.0	305	305	305	305	305	305	305	305	305	305	305	305	305
G 23.0	303	303	303	303	303	303	303	303	303	303	303	303	303
G 24.0	300	300	300	300	300	300	301	301	301	301	301	301	301
G 25.0	298	298	298	298	298	298	298	298	298	298	298	298	298
G 26.0	295	295	296	296	296	296	296	296	296	296	296	296	296
G 27.0	293	293	293	293	293	293	293	293	293	293	293	293	293
G 28.0	290	290	291	291	291	291	291	291	291	291	291	291	290
G 29.0	288	288	288	288	288	288	288	288	288	288	288	288	288
G 30.0	285	285	285	285	285	285	285	285	285	285	285	285	285
G 31.0	282	282	282	282	282	282	282	282	282	282	282	282	282
G 32.0	279	279	279	279	279	279	279	279	279	279	279	279	279
G 33.0	276	276	276	276	276	276	276	276	276	276	276	276	276
G 34.0	273	273	273	273	273	273	273	273	273	273	273	273	273
G 35.0	270	270	270	270	270	270	270	270	270	270	270	270	270
G 36.0	267	267	267	267	267	267	267	267	267	267	267	267	267
G 37.0	264	264	264	264	264	264	264	264	264	264	264	264	264
G 38.0	260	260	261	261	261	261	261	261	261	261	261	261	261
G 39.0	257	257	257	257	257	257	257	257	257	257	257	257	257
G 40.0	254	254	254	253	253	253	253	253	253	254	254	254	254
G 41.0	251	251	250	250	250	250	250	250	250	250	250	250	251
G 42.0	248	248	247	247	247	247	247	247	247	247	247	247	247
G 43.0	244	244	244	244	244	244	244	244	244	244	244	244	244
G 44.0	241	241	241	241	241	241	241	241	241	241	241	241	241
G 45.0	237	237	238	238	238	238	238	238	238	238	238	238	238
G 46.0	234	234	234	234	235	235	235	235	235	235	235	235	235
G 47.0	231	231	231	231	232	232	232	232	232	232	232	232	232
G 48.0	228	228	228	228	228	228	228	228	228	228	228	228	229
G 49.0	225	225	225	225	225	225	225	225	225	225	225	225	225
G 50.0	222	222	222	221	221	221	221	221	221	222	222	222	222
G 51.0	219	219	218	218	218	218	218	218	218	218	218	219	219
G 52.0	215	215	215	215	215	215	215	215	215	215	215	215	216
G 53.0	212	212	212	212	212	212	212	212	212	212	212	212	212
G 54.0	209	209	209	209	209	209	209	209	209	209	209	209	209
G 55.0	205	205	205	206	206	206	206	206	206	206	206	206	206
G 56.0	202	202	202	202	202	202	202	202	202	202	202	202	202
G 57.0	198	198	198	199	199	199	199	199	199	199	199	199	199
G 58.0	195	195	195	195	195	195	195	195	195	195	195	195	195
G 59.0	192	191	191	191	191	191	191	191	191	191	191	191	191
G 60.0	188	188	188	188	188	188	188	188	188	188	188	188	188
G 61.0	184	184	184	184	184	184	184	184	184	184	184	184	184
G 62.0	181	180	180	180	180	180	180	180	180	181	181	181	181
G 63.0	177	177	177	177	177	177	177	177	177	177	177	177	177
G 64.0	173	173	173	173	173	173	173	173	174	174	174	174	174
G 65.0	170	170	170	170	170	170	170	170	170	170	170	170	170
G 66.0	166	166	166	166	166	166	166	166	166	166	166	166	166
G 67.0	162	162	162	162	162	162	162	162	162	162	162	163	163
G 68.0	158	158	158	158	158	158	158	158	158	158	159	159	159
G 69.0	155	155	155	155	155	155	154	154	155	155	155	155	155
G 70.0	151	151	151	151	151	151	151	151	151	151	151	151	151
G 71.0	148	148	148	148	147	147	147	147	147	147	147	148	148
G 72.0	144	144	144	144	144	144	144	144	144	144	144	144	144

Luminaire

Code 5480
Name PUCK WALL ART LED

Measurem.

Code
Name 2700K CRI90

Luminaire Flux		1366.61 lm		Luminaire Power		25.61 W		Efficacy		53.37 lm/W		Efficiency		100.00%	
Sources Flux		1366.61 lm		Maximum value		330.80 cd		Position		C=0.00 G=0.00		CG Asymmetrical			
Luminous Intensity Table cd Table 5/18															
	C 260.00	C 265.00	C 270.00	C 275.00	C 280.00	C 285.00	C 290.00	C 295.00	C 300.00	C 305.00	C 310.00	C 315.00	C 320.00		
G 0.0	331	331	331	331	331	331	331	331	331	331	331	331	331	331	331
G 1.0	331	331	331	331	331	331	331	331	331	331	331	331	331	331	331
G 2.0	331	331	331	331	331	331	331	331	331	331	331	331	331	331	331
G 3.0	330	330	330	330	330	330	330	330	330	330	330	330	330	330	330
G 4.0	330	330	330	330	330	330	330	330	330	330	330	330	330	330	330
G 5.0	329	329	329	329	329	329	329	329	329	329	329	329	329	329	329
G 6.0	329	329	329	329	329	329	329	329	329	329	329	329	329	329	329
G 7.0	328	328	328	328	328	328	328	328	328	328	328	328	328	328	328
G 8.0	327	327	327	327	327	327	327	327	327	327	327	327	327	327	327
G 9.0	326	326	326	326	326	326	326	326	326	326	326	326	326	326	326
G 10.0	325	325	325	325	325	325	325	325	325	325	325	325	325	325	325
G 11.0	324	324	324	324	324	324	324	324	324	324	324	324	324	324	324
G 12.0	323	323	323	323	323	323	323	323	323	323	323	323	323	323	323
G 13.0	322	322	322	322	322	322	322	322	322	322	322	322	322	322	322
G 14.0	320	320	320	320	320	320	320	320	320	320	320	320	320	320	320
G 15.0	319	319	319	319	319	319	319	319	319	319	319	319	319	319	319
G 16.0	317	317	317	317	317	317	317	317	317	317	317	317	317	317	317
G 17.0	315	315	315	315	315	315	316	316	316	316	316	316	316	316	316
G 18.0	314	314	314	314	314	314	314	314	314	314	314	314	314	314	314
G 19.0	312	312	312	312	312	312	312	311	311	311	311	311	311	311	311
G 20.0	309	310	310	310	309	309	309	309	309	309	309	309	309	309	309
G 21.0	307	307	307	307	307	307	307	307	307	307	307	307	307	307	307
G 22.0	305	305	305	305	305	305	305	305	305	305	305	305	305	305	305
G 23.0	303	303	303	303	303	303	303	303	303	303	303	303	303	303	303
G 24.0	301	301	301	301	301	301	301	301	301	301	301	301	301	301	300
G 25.0	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298
G 26.0	296	296	296	296	296	296	296	296	296	296	296	296	296	296	296
G 27.0	293	293	293	293	293	293	293	293	293	293	293	293	293	293	293
G 28.0	290	290	290	290	290	290	291	291	291	291	291	291	291	291	291
G 29.0	288	288	288	288	288	288	288	288	288	288	288	288	288	288	288
G 30.0	285	285	285	285	285	285	285	285	285	285	285	285	285	285	285
G 31.0	282	282	282	282	282	282	282	282	282	282	282	282	282	282	282
G 32.0	279	279	279	279	279	279	279	279	279	279	279	279	279	279	279
G 33.0	276	276	276	276	276	276	276	276	276	276	276	276	276	276	276
G 34.0	273	273	273	273	273	273	273	273	273	273	273	273	273	273	273
G 35.0	270	270	270	270	270	270	270	270	270	270	270	270	270	270	270
G 36.0	267	267	267	267	267	267	267	267	267	267	267	267	267	267	267
G 37.0	264	264	264	264	264	264	264	264	264	264	264	264	264	264	264
G 38.0	261	261	260	261	261	261	261	261	261	261	261	261	261	261	261
G 39.0	257	257	257	257	257	257	257	257	257	257	257	257	257	257	257
G 40.0	254	254	254	254	254	254	254	254	254	253	253	253	253	253	253
G 41.0	251	251	251	251	251	251	250	250	250	250	250	250	250	250	250
G 42.0	247	247	248	247	247	247	247	247	247	247	247	247	247	247	247
G 43.0	244	244	244	244	244	244	244	244	244	244	244	244	244	244	244
G 44.0	241	241	241	241	241	241	241	241	241	241	241	241	241	241	241
G 45.0	238	238	238	238	238	238	238	238	238	238	238	238	238	238	238
G 46.0	235	235	235	235	235	235	235	235	235	235	235	235	235	235	235
G 47.0	232	232	232	232	232	232	232	232	232	232	232	232	232	232	232
G 48.0	229	229	229	229	229	229	228	228	228	228	228	228	228	228	228
G 49.0	225	225	225	225	225	225	225	225	225	225	225	225	225	225	225
G 50.0	222	222	222	222	222	222	222	222	222	221	221	221	221	221	221
G 51.0	219	219	219	219	219	219	219	218	218	218	218	218	218	218	218
G 52.0	216	216	216	216	216	216	215	215	215	215	215	215	215	215	215
G 53.0	212	213	213	213	212	212	212	212	212	212	212	212	212	212	212
G 54.0	209	209	209	209	209	209	209	209	209	209	209	209	209	209	209
G 55.0	206	206	206	206	206	206	206	206	206	206	206	206	206	206	206
G 56.0	203	203	203	203	203	202	202	202	202	202	202	202	202	202	202
G 57.0	199	199	199	199	199	199	199	199	199	199	199	199	199	199	199
G 58.0	195	195	195	195	195	195	195	195	195	195	195	195	195	195	195
G 59.0	191	191	191	191	191	191	191	191	191	191	191	191	191	191	191
G 60.0	188	188	188	188	188	188	188	188	188	188	188	188	188	188	188
G 61.0	184	184	184	184	184	184	184	184	184	184	184	184	184	184	184
G 62.0	181	181	181	181	181	181	181	181	181	180	180	180	180	180	180
G 63.0	177	178	178	178	177	177	177	177	177	177	177	177	177	177	177
G 64.0	174	174	174	174	174	174	174	174	174	174	173	173	173	173	173
G 65.0	170	170	170	170	170	170	170	170	170	170	170	170	170	170	170
G 66.0	166	167	167	167	166	166	166	166	166	166	166	166	166	166	166
G 67.0	163	163	163	163	163	163	163	162	162	162	162	162	162	162	162
G 68.0	159	159	159	159	159	159	159	159	158	158	158	158	158	158	158
G 69.0	155	155	155	155	155	155	155	155	155	155	155	154	154	155	155
G 70.0	151	151	151	151	151	151	151	151	151	151	151	151	151	151	151
G 71.0	148	148	148	148	148	148	148	148	147	147	147	147	147	147	147
G 72.0	145	145	145	145	145	144	144	144	144	144	144	144	144	144	144

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG	Asymmetrical

Luminous Intensity Table cd Table 6/18

	C 325.00	C 330.00	C 335.00	C 340.00	C 345.00	C 350.00	C 355.00
G 0.0	331	331	331	331	331	331	331
G 1.0	331	331	331	331	331	331	331
G 2.0	331	331	331	331	331	331	331
G 3.0	330	330	330	330	330	330	330
G 4.0	330	330	330	330	330	330	330
G 5.0	329	329	329	329	329	329	329
G 6.0	329	329	329	329	329	329	329
G 7.0	328	328	328	328	328	328	328
G 8.0	327	327	327	327	327	327	327
G 9.0	326	326	326	326	326	326	326
G 10.0	325	325	325	325	325	325	325
G 11.0	324	324	324	324	324	324	324
G 12.0	323	323	323	323	323	323	323
G 13.0	322	322	322	322	322	322	322
G 14.0	320	320	320	320	320	320	320
G 15.0	319	319	319	319	319	318	318
G 16.0	317	317	317	317	317	317	317
G 17.0	315	315	315	315	315	315	315
G 18.0	314	314	314	313	313	313	313
G 19.0	311	311	311	311	311	312	312
G 20.0	309	309	309	309	309	310	310
G 21.0	307	307	307	307	307	308	308
G 22.0	305	305	305	305	305	305	305
G 23.0	303	303	303	303	303	303	303
G 24.0	300	300	300	300	300	300	300
G 25.0	298	298	298	298	298	298	298
G 26.0	296	296	296	295	295	295	295
G 27.0	293	293	293	293	293	293	293
G 28.0	291	291	291	290	290	290	290
G 29.0	288	288	288	288	288	288	288
G 30.0	285	285	285	285	285	285	285
G 31.0	282	282	282	282	282	282	282
G 32.0	279	279	279	279	279	279	280
G 33.0	276	276	276	276	276	276	276
G 34.0	273	273	273	273	273	273	273
G 35.0	270	270	270	270	270	270	270
G 36.0	267	267	267	267	267	266	266
G 37.0	264	264	264	264	264	263	263
G 38.0	261	261	261	260	260	260	260
G 39.0	257	257	257	257	257	257	257
G 40.0	253	253	254	254	254	254	254
G 41.0	250	250	250	251	251	251	251
G 42.0	247	247	247	248	248	248	248
G 43.0	244	244	244	244	244	244	244
G 44.0	241	241	241	241	241	241	241
G 45.0	238	238	238	237	237	237	237
G 46.0	235	234	234	234	234	234	234
G 47.0	231	231	231	231	231	231	231
G 48.0	228	228	228	228	228	228	228
G 49.0	225	225	225	225	225	225	225
G 50.0	221	221	222	222	222	222	222
G 51.0	218	218	218	219	219	219	219
G 52.0	215	215	215	215	215	215	216
G 53.0	212	212	212	212	212	212	212
G 54.0	209	209	209	209	209	209	209
G 55.0	206	206	205	205	205	205	205
G 56.0	202	202	202	202	202	202	202
G 57.0	199	199	198	198	198	198	198
G 58.0	195	195	195	195	195	195	195
G 59.0	191	191	191	191	192	192	192
G 60.0	188	188	188	188	188	188	188
G 61.0	184	184	184	184	184	184	185
G 62.0	180	180	180	180	181	181	181
G 63.0	177	177	177	177	177	177	177
G 64.0	173	173	173	173	173	173	173
G 65.0	170	170	170	170	170	170	170
G 66.0	166	166	166	166	166	166	166
G 67.0	162	162	162	162	162	162	162
G 68.0	158	158	158	158	158	159	159
G 69.0	155	155	155	155	155	155	155
G 70.0	151	151	151	151	151	152	152
G 71.0	147	148	148	148	148	148	148
G 72.0	144	144	144	144	144	144	145

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 7/18

	C 0.00	C 5.00	C 10.00	C 15.00	C 20.00	C 25.00	C 30.00	C 35.00	C 40.00	C 45.00	C 50.00	C 55.00	C 60.00
G 73.0	141	141	141	141	141	141	141	141	141	141	141	141	141
G 74.0	137	137	137	137	137	137	137	137	137	138	138	138	138
G 75.0	133	134	134	134	134	134	134	134	134	134	134	134	134
G 76.0	130	130	130	130	130	130	130	130	130	130	130	130	130
G 77.0	127	127	127	127	127	127	127	127	127	127	127	127	127
G 78.0	124	124	124	124	123	123	123	123	123	123	123	123	123
G 79.0	121	121	120	120	120	120	120	120	120	120	120	120	120
G 80.0	117	117	117	117	117	117	117	117	117	117	117	117	117
G 81.0	114	114	114	113	113	113	113	113	113	113	113	113	113
G 82.0	110	110	110	110	110	110	110	110	110	110	110	110	110
G 83.0	107	107	107	107	107	107	107	107	107	107	107	107	107
G 84.0	103	103	103	103	103	104	104	104	104	104	104	104	104
G 85.0	100	100	100	100	100	100	100	101	101	101	101	101	101
G 86.0	97	97	97	97	97	97	97	97	97	97	97	98	98
G 87.0	94	94	94	94	94	94	94	94	94	94	94	94	95
G 88.0	91	91	91	90	90	90	90	90	91	91	91	91	92
G 89.0	88	88	88	88	88	88	88	88	88	88	89	89	89
G 90.0	85	85	85	85	85	86	86	86	86	86	86	86	86
G 91.0	81	82	82	82	82	82	83	83	83	83	83	83	83
G 92.0	78	78	78	79	79	79	79	79	79	79	80	80	80
G 93.0	75	75	75	75	76	76	76	76	76	76	77	77	77
G 94.0	72	72	73	73	73	73	73	73	74	74	74	74	74
G 95.0	70	70	70	70	70	71	71	71	71	71	71	71	71
G 96.0	67	67	67	67	68	68	68	68	68	68	68	68	69
G 97.0	65	65	65	65	65	65	65	65	65	65	65	66	66
G 98.0	62	62	62	62	62	62	62	62	62	63	63	63	63
G 99.0	60	60	60	60	60	60	60	60	60	60	60	61	61
G100.0	57	57	57	57	57	57	58	58	58	58	58	59	59
G101.0	54	54	54	55	55	55	55	56	56	56	56	57	57
G102.0	50	51	51	52	52	53	53	53	54	54	54	55	55
G103.0	48	48	49	49	50	50	51	51	51	52	52	52	53
G104.0	45	45	46	47	47	48	48	48	49	49	49	50	50
G105.0	42	43	43	44	44	45	45	46	46	46	47	47	47
G106.0	40	40	41	41	42	42	43	43	43	44	44	44	44
G107.0	37	38	38	39	39	39	40	40	41	41	41	42	42
G108.0	34	35	35	36	36	37	37	38	38	39	39	39	39
G109.0	32	32	33	33	34	35	35	36	36	36	37	37	37
G110.0	29	29	30	31	32	32	33	33	34	34	34	35	35
G111.0	25	26	27	28	29	30	30	31	31	32	32	32	32
G112.0	22	23	24	25	26	27	28	28	29	30	30	30	30
G113.0	20	21	22	23	24	25	25	26	27	27	28	28	28
G114.0	17	18	19	20	21	22	23	24	24	25	25	25	26
G115.0	15	16	17	18	19	20	21	21	22	22	23	23	23
G116.0	13	14	15	16	17	17	18	19	19	20	20	20	20
G117.0	12	12	13	14	14	15	16	16	17	17	17	18	18
G118.0	10	10	11	12	12	13	13	14	14	15	15	15	15
G119.0	8	9	9	10	10	11	11	12	12	12	13	13	13
G120.0	6	7	7	8	8	9	9	10	10	10	11	11	11
G121.0	4	5	5	6	6	7	7	8	8	8	9	9	9
G122.0	3	3	4	4	5	5	6	6	6	6	7	7	7
G123.0	2	2	2	3	3	3	4	4	4	5	5	5	5
G124.0	1	1	1	2	2	2	2	3	3	3	3	3	3
G125.0	1	1	1	1	1	1	1	1	1	2	2	2	2
G126.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G127.0	0	0	0	0	0	0	0	1	1	1	1	1	1
G128.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G129.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G131.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G132.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G133.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G134.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G136.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G137.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G138.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G139.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G141.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G142.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G143.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G144.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0	0	0

Luminaire

Code 5480

Name PUCK WALL ART LED

Measurem.

Code

Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 8/18

	C 65.00	C 70.00	C 75.00	C 80.00	C 85.00	C 90.00	C 95.00	C 100.00	C 105.00	C 110.00	C 115.00	C 120.00	C 125.00
G 73.0	141	141	141	141	141	141	141	141	141	141	141	141	141
G 74.0	138	138	138	138	138	138	138	138	138	138	138	138	138
G 75.0	134	134	134	134	134	134	134	134	134	134	134	134	134
G 76.0	131	131	131	131	131	131	131	131	131	131	131	130	130
G 77.0	127	127	127	127	127	128	127	127	127	127	127	127	127
G 78.0	123	123	124	124	124	124	124	124	124	123	123	123	123
G 79.0	120	120	120	120	120	121	120	120	120	120	120	120	120
G 80.0	117	117	117	117	117	117	117	117	117	117	117	117	117
G 81.0	114	114	114	114	114	114	114	114	114	114	114	113	113
G 82.0	110	111	111	111	111	111	111	111	111	111	110	110	110
G 83.0	107	108	108	108	108	108	108	108	108	108	107	107	107
G 84.0	104	104	105	105	105	105	105	105	105	104	104	104	104
G 85.0	101	101	102	102	102	102	102	102	102	101	101	101	101
G 86.0	98	99	99	99	100	100	100	99	99	99	98	98	98
G 87.0	95	96	96	97	97	98	97	97	96	96	95	95	94
G 88.0	92	93	93	94	94	95	94	94	93	93	92	92	91
G 89.0	89	90	90	90	91	91	91	90	90	90	89	89	89
G 90.0	86	86	86	86	87	87	87	86	86	86	86	86	86
G 91.0	83	83	83	83	83	83	83	83	83	83	83	83	83
G 92.0	80	80	80	80	80	80	80	80	80	80	80	80	80
G 93.0	77	77	77	77	77	77	77	77	77	77	77	77	77
G 94.0	74	74	74	75	75	75	75	75	74	74	74	74	74
G 95.0	72	72	72	72	72	72	72	72	72	72	72	71	71
G 96.0	69	69	69	69	70	70	70	69	69	69	69	69	68
G 97.0	66	66	67	67	67	67	67	67	67	66	66	66	66
G 98.0	63	64	64	64	65	65	65	64	64	64	63	63	63
G 99.0	61	61	62	62	62	63	62	62	62	61	61	61	61
G100.0	59	59	60	60	60	61	60	60	60	59	59	59	59
G101.0	57	58	58	58	58	59	58	58	58	58	57	57	57
G102.0	55	56	56	56	56	57	56	56	56	56	55	55	55
G103.0	53	53	53	54	54	54	54	54	53	53	53	53	52
G104.0	50	50	50	50	51	51	51	50	50	50	50	50	50
G105.0	47	47	47	47	47	47	47	47	47	47	47	47	47
G106.0	44	45	45	45	45	45	45	45	45	45	44	44	44
G107.0	42	42	42	42	43	43	43	42	42	42	42	42	42
G108.0	40	40	40	40	40	40	40	40	40	40	40	39	39
G109.0	37	38	38	38	38	38	38	38	38	38	37	37	37
G110.0	35	35	35	35	35	35	35	35	35	35	35	35	35
G111.0	33	33	33	33	33	33	33	33	33	33	33	32	32
G112.0	31	31	31	31	31	30	31	31	31	31	31	30	30
G113.0	28	28	28	28	28	28	28	28	28	28	28	28	28
G114.0	26	26	26	26	26	26	26	26	26	26	26	26	25
G115.0	23	23	23	23	23	23	23	23	23	23	23	23	23
G116.0	20	20	20	21	21	21	21	21	20	20	20	20	20
G117.0	18	18	18	18	18	18	18	18	18	18	18	18	18
G118.0	16	16	16	16	16	16	16	16	16	16	16	15	15
G119.0	13	13	13	13	13	14	13	13	13	13	13	13	13
G120.0	11	11	11	11	11	11	11	11	11	11	11	11	11
G121.0	9	9	9	9	9	9	9	9	9	9	9	9	9
G122.0	7	7	7	7	7	7	7	7	7	7	7	7	7
G123.0	5	5	5	5	5	5	5	5	5	5	5	5	5
G124.0	3	3	3	3	3	3	3	3	3	3	3	3	3
G125.0	2	2	2	2	2	2	2	2	2	2	2	2	2
G126.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G127.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G128.0	1	1	1	1	1	1	1	1	1	1	1	0	0
G129.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G131.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G132.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G133.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G134.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G136.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G137.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G138.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G139.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G141.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G142.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G143.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G144.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0	0	0

Luminaire

Code 5480
Name PUCK WALL ART LED

Measurem.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 9/18

	C 130.00	C 135.00	C 140.00	C 145.00	C 150.00	C 155.00	C 160.00	C 165.00	C 170.00	C 175.00	C 180.00	C 185.00	C 190.00
G 73.0	141	141	141	141	141	141	141	141	141	141	141	141	141
G 74.0	138	138	137	137	137	137	137	137	137	137	137	137	137
G 75.0	134	134	134	134	134	134	134	134	134	134	133	134	134
G 76.0	130	130	130	130	130	130	130	130	130	130	130	130	130
G 77.0	127	127	127	127	127	127	127	127	127	127	127	127	127
G 78.0	123	123	123	123	123	123	123	124	124	124	124	124	124
G 79.0	120	120	120	120	120	120	120	120	120	121	121	121	120
G 80.0	117	117	117	117	117	117	117	117	117	117	117	117	117
G 81.0	113	113	113	113	113	113	113	113	114	114	114	114	114
G 82.0	110	110	110	110	110	110	110	110	110	110	110	110	110
G 83.0	107	107	107	107	107	107	107	107	107	107	107	107	107
G 84.0	104	104	104	104	104	104	103	103	103	103	103	103	103
G 85.0	101	101	101	101	100	100	100	100	100	100	100	100	100
G 86.0	97	97	97	97	97	97	97	97	97	97	97	97	97
G 87.0	94	94	94	94	94	94	94	94	94	94	94	94	94
G 88.0	91	91	91	90	90	90	90	90	91	91	91	91	91
G 89.0	89	88	88	88	88	88	88	88	88	88	88	88	88
G 90.0	86	86	86	86	86	85	85	85	85	85	85	85	85
G 91.0	83	83	83	83	82	82	82	82	82	82	81	82	82
G 92.0	80	79	79	79	79	79	79	79	78	78	78	78	78
G 93.0	77	76	76	76	76	76	76	75	75	75	75	75	75
G 94.0	74	74	74	73	73	73	73	73	73	72	72	72	73
G 95.0	71	71	71	71	71	71	70	70	70	70	70	70	70
G 96.0	68	68	68	68	68	68	68	67	67	67	67	67	67
G 97.0	65	65	65	65	65	65	65	65	65	65	65	65	65
G 98.0	63	63	62	62	62	62	62	62	62	62	62	62	62
G 99.0	60	60	60	60	60	60	60	60	60	60	60	60	60
G100.0	58	58	58	58	58	57	57	57	57	57	57	57	57
G101.0	56	56	56	56	55	55	55	55	54	54	54	54	54
G102.0	54	54	54	53	53	53	52	52	51	51	50	51	51
G103.0	52	52	51	51	51	50	50	49	49	48	48	48	49
G104.0	49	49	49	48	48	48	47	47	46	45	45	45	46
G105.0	47	46	46	46	45	45	44	44	43	43	42	43	43
G106.0	44	44	43	43	43	42	42	41	41	40	40	40	41
G107.0	41	41	41	40	40	39	39	39	38	38	37	38	38
G108.0	39	39	38	38	37	37	36	36	35	35	34	35	35
G109.0	37	36	36	36	35	35	34	33	33	32	32	32	33
G110.0	34	34	34	33	33	32	32	31	30	29	29	29	30
G111.0	32	32	31	31	30	30	29	28	27	26	25	26	27
G112.0	30	30	29	28	28	27	26	25	24	23	22	23	24
G113.0	28	27	27	26	25	25	24	23	22	21	20	21	22
G114.0	25	25	24	24	23	22	21	20	19	18	17	18	19
G115.0	23	22	22	21	21	20	19	18	17	16	15	16	17
G116.0	20	20	19	19	18	17	17	16	15	14	13	14	15
G117.0	17	17	17	16	16	15	14	14	13	12	12	12	13
G118.0	15	15	14	14	13	13	12	12	11	10	10	10	11
G119.0	13	12	12	12	11	11	10	10	9	9	8	9	9
G120.0	10	10	10	10	9	9	8	8	7	7	6	7	7
G121.0	8	8	8	8	7	7	6	6	5	5	4	5	5
G122.0	7	6	6	6	6	5	5	4	4	3	3	3	4
G123.0	5	5	4	4	4	3	3	3	2	2	2	2	2
G124.0	3	3	3	3	2	2	2	2	1	1	1	1	1
G125.0	2	2	1	1	1	1	1	1	1	1	1	1	1
G126.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G127.0	1	1	1	1	0	0	0	0	0	0	0	0	0
G128.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G129.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G131.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G132.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G133.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G134.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G136.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G137.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G138.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G139.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G141.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G142.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G143.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G144.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0	0	0

Luminaire
Code 5480
Name PUCK WALL ART LED
Measur.
Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 10/18

	C 195.00	C 200.00	C 205.00	C 210.00	C 215.00	C 220.00	C 225.00	C 230.00	C 235.00	C 240.00	C 245.00	C 250.00	C 255.00
G 73.0	141	141	141	141	141	141	141	141	141	141	141	141	141
G 74.0	137	137	137	137	137	137	138	138	138	138	138	138	138
G 75.0	134	134	134	134	134	134	134	134	134	134	134	134	134
G 76.0	130	130	130	130	130	130	130	130	130	130	131	131	131
G 77.0	127	127	127	127	127	127	127	127	127	127	127	127	127
G 78.0	124	123	123	123	123	123	123	123	123	123	123	123	124
G 79.0	120	120	120	120	120	120	120	120	120	120	120	120	120
G 80.0	117	117	117	117	117	117	117	117	117	117	117	117	117
G 81.0	113	113	113	113	113	113	113	113	113	113	114	114	114
G 82.0	110	110	110	110	110	110	110	110	110	110	110	111	111
G 83.0	107	107	107	107	107	107	107	107	107	107	107	108	108
G 84.0	103	103	104	104	104	104	104	104	104	104	104	104	105
G 85.0	100	100	100	100	101	101	101	101	101	101	101	101	102
G 86.0	97	97	97	97	97	97	97	97	98	98	98	99	99
G 87.0	94	94	94	94	94	94	94	94	94	95	95	96	96
G 88.0	90	90	90	90	90	91	91	91	91	92	92	93	93
G 89.0	88	88	88	88	88	88	88	89	89	89	89	90	90
G 90.0	85	85	85	86	86	86	86	86	86	86	86	86	86
G 91.0	82	82	82	82	83	83	83	83	83	83	83	83	83
G 92.0	79	79	79	79	79	79	79	80	80	80	80	80	80
G 93.0	75	76	76	76	76	76	76	77	77	77	77	77	77
G 94.0	73	73	73	73	73	74	74	74	74	74	74	74	74
G 95.0	70	70	71	71	71	71	71	71	71	71	72	72	72
G 96.0	67	68	68	68	68	68	68	68	68	69	69	69	69
G 97.0	65	65	65	65	65	65	65	65	66	66	66	66	67
G 98.0	62	62	62	62	62	62	63	63	63	63	63	64	64
G 99.0	60	60	60	60	60	60	60	61	61	61	61	61	62
G100.0	57	57	57	58	58	58	58	58	59	59	59	59	60
G101.0	55	55	55	55	56	56	56	56	57	57	57	58	58
G102.0	52	52	53	53	53	54	54	54	55	55	55	56	56
G103.0	49	50	50	51	51	51	52	52	52	53	53	53	53
G104.0	47	47	48	48	48	49	49	49	50	50	50	50	50
G105.0	44	44	45	45	46	46	46	47	47	47	47	47	47
G106.0	41	42	42	43	43	43	44	44	44	44	44	45	45
G107.0	39	39	39	40	40	41	41	41	42	42	42	42	42
G108.0	36	36	37	37	38	38	39	39	39	39	40	40	40
G109.0	33	34	35	35	36	36	36	37	37	37	37	38	38
G110.0	31	32	32	33	33	34	34	34	35	35	35	35	35
G111.0	28	29	30	30	31	31	32	32	32	32	33	33	33
G112.0	25	26	27	28	28	29	30	30	30	30	31	31	31
G113.0	23	24	25	25	26	27	27	28	28	28	28	28	28
G114.0	20	21	22	23	24	24	25	25	25	26	26	26	26
G115.0	18	19	20	21	21	22	22	23	23	23	23	23	23
G116.0	16	17	17	18	19	19	20	20	20	20	20	20	20
G117.0	14	14	15	16	16	17	17	17	18	18	18	18	18
G118.0	12	12	13	13	14	14	15	15	15	15	16	16	16
G119.0	10	10	11	11	12	12	12	13	13	13	13	13	13
G120.0	8	8	9	9	10	10	10	10	11	11	11	11	11
G121.0	6	6	7	7	8	8	8	8	9	9	9	9	9
G122.0	4	5	5	6	6	6	6	7	7	7	7	7	7
G123.0	3	3	3	4	4	4	5	5	5	5	5	5	5
G124.0	2	2	2	2	3	3	3	3	3	3	3	3	3
G125.0	1	1	1	1	1	1	2	2	2	2	2	2	2
G126.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G127.0	0	0	0	0	1	1	1	1	1	1	1	1	1
G128.0	0	0	0	0	0	0	0	0	0	0	1	1	1
G129.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G131.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G132.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G133.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G134.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G136.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G137.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G138.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G139.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G141.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G142.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G143.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G144.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0	0	0

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 11/18

	C 260.00	C 265.00	C 270.00	C 275.00	C 280.00	C 285.00	C 290.00	C 295.00	C 300.00	C 305.00	C 310.00	C 315.00	C 320.00
G 73.0	141	141	141	141	141	141	141	141	141	141	141	141	141
G 74.0	138	138	138	138	138	138	138	138	138	138	138	138	137
G 75.0	134	134	134	134	134	134	134	134	134	134	134	134	134
G 76.0	131	131	131	131	131	131	131	131	130	130	130	130	130
G 77.0	127	127	128	127	127	127	127	127	127	127	127	127	127
G 78.0	124	124	124	124	124	124	123	123	123	123	123	123	123
G 79.0	120	120	121	120	120	120	120	120	120	120	120	120	120
G 80.0	117	117	117	117	117	117	117	117	117	117	117	117	117
G 81.0	114	114	114	114	114	114	114	114	113	113	113	113	113
G 82.0	111	111	111	111	111	111	111	110	110	110	110	110	110
G 83.0	108	108	108	108	108	108	108	107	107	107	107	107	107
G 84.0	105	105	105	105	105	105	104	104	104	104	104	104	104
G 85.0	102	102	102	102	102	102	101	101	101	101	101	101	101
G 86.0	99	100	100	100	99	99	99	98	98	98	97	97	97
G 87.0	97	97	98	97	97	96	96	95	95	94	94	94	94
G 88.0	94	94	95	94	94	93	93	92	92	91	91	91	91
G 89.0	90	91	91	91	90	90	90	89	89	89	89	88	88
G 90.0	86	87	87	87	86	86	86	86	86	86	86	86	86
G 91.0	83	83	83	83	83	83	83	83	83	83	83	83	83
G 92.0	80	80	80	80	80	80	80	80	80	80	80	79	79
G 93.0	77	77	77	77	77	77	77	77	77	77	77	76	76
G 94.0	75	75	75	75	75	74	74	74	74	74	74	74	74
G 95.0	72	72	72	72	72	72	72	72	71	71	71	71	71
G 96.0	69	70	70	70	69	69	69	69	69	68	68	68	68
G 97.0	67	67	67	67	67	66	66	66	66	66	65	65	65
G 98.0	64	65	65	65	64	64	64	63	63	63	63	63	62
G 99.0	62	62	63	62	62	62	61	61	61	61	60	60	60
G100.0	60	60	61	60	60	60	59	59	59	59	58	58	58
G101.0	58	58	59	58	58	58	58	57	57	57	56	56	56
G102.0	56	56	57	56	56	56	56	55	55	55	54	54	54
G103.0	54	54	54	54	54	53	53	53	53	52	52	52	51
G104.0	50	51	51	51	50	50	50	50	50	50	49	49	49
G105.0	47	47	47	47	47	47	47	47	47	47	47	46	46
G106.0	45	45	45	45	45	45	44	44	44	44	44	44	43
G107.0	42	43	43	43	42	42	42	42	42	42	41	41	41
G108.0	40	40	40	40	40	40	40	40	39	39	39	39	38
G109.0	38	38	38	38	38	38	38	37	37	37	37	36	36
G110.0	35	35	35	35	35	35	35	35	35	35	34	34	34
G111.0	33	33	33	33	33	33	33	33	32	32	32	32	31
G112.0	31	31	30	31	31	31	31	31	30	30	30	30	29
G113.0	28	28	28	28	28	28	28	28	28	28	27	27	27
G114.0	26	26	26	26	26	26	26	26	26	25	25	25	24
G115.0	23	23	23	23	23	23	23	23	23	23	22	22	22
G116.0	21	21	21	21	21	20	20	20	20	20	20	20	19
G117.0	18	18	18	18	18	18	18	18	18	18	17	17	17
G118.0	16	16	16	16	16	16	16	16	15	15	15	15	14
G119.0	13	13	14	13	13	13	13	13	13	13	13	12	12
G120.0	11	11	11	11	11	11	11	11	11	11	10	10	10
G121.0	9	9	9	9	9	9	9	9	9	9	8	8	8
G122.0	7	7	7	7	7	7	7	7	7	7	7	6	6
G123.0	5	5	5	5	5	5	5	5	5	5	5	5	4
G124.0	3	3	3	3	3	3	3	3	3	3	3	3	3
G125.0	2	2	2	2	2	2	2	2	2	2	2	2	1
G126.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G127.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G128.0	1	1	1	1	1	1	1	1	0	0	0	0	0
G129.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G131.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G132.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G133.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G134.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G136.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G137.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G138.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G139.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G141.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G142.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G143.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G144.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0	0	0

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 12/18

	C 325.00	C 330.00	C 335.00	C 340.00	C 345.00	C 350.00	C 355.00
G 73.0	141	141	141	141	141	141	141
G 74.0	137	137	137	137	137	137	137
G 75.0	134	134	134	134	134	134	134
G 76.0	130	130	130	130	130	130	130
G 77.0	127	127	127	127	127	127	127
G 78.0	123	123	123	123	124	124	124
G 79.0	120	120	120	120	120	120	121
G 80.0	117	117	117	117	117	117	117
G 81.0	113	113	113	113	113	114	114
G 82.0	110	110	110	110	110	110	110
G 83.0	107	107	107	107	107	107	107
G 84.0	104	104	104	103	103	103	103
G 85.0	101	100	100	100	100	100	100
G 86.0	97	97	97	97	97	97	97
G 87.0	94	94	94	94	94	94	94
G 88.0	90	90	90	90	90	91	91
G 89.0	88	88	88	88	88	88	88
G 90.0	86	86	85	85	85	85	85
G 91.0	83	82	82	82	82	82	82
G 92.0	79	79	79	79	79	78	78
G 93.0	76	76	76	76	75	75	75
G 94.0	73	73	73	73	73	73	72
G 95.0	71	71	71	70	70	70	70
G 96.0	68	68	68	68	67	67	67
G 97.0	65	65	65	65	65	65	65
G 98.0	62	62	62	62	62	62	62
G 99.0	60	60	60	60	60	60	60
G100.0	58	58	57	57	57	57	57
G101.0	56	55	55	55	55	54	54
G102.0	53	53	53	52	52	51	51
G103.0	51	51	50	50	49	49	48
G104.0	48	48	48	47	47	46	45
G105.0	46	45	45	44	44	43	43
G106.0	43	43	42	42	41	41	40
G107.0	40	40	39	39	39	38	38
G108.0	38	37	37	36	36	35	35
G109.0	36	35	35	34	33	33	32
G110.0	33	33	32	32	31	30	29
G111.0	31	30	30	29	28	27	26
G112.0	28	28	27	26	25	24	23
G113.0	26	25	25	24	23	22	21
G114.0	24	23	22	21	20	19	18
G115.0	21	21	20	19	18	17	16
G116.0	19	18	17	17	16	15	14
G117.0	16	16	15	14	14	13	12
G118.0	14	13	13	12	12	11	10
G119.0	12	11	11	10	10	9	9
G120.0	10	9	9	8	8	7	7
G121.0	8	7	7	6	6	5	5
G122.0	6	6	5	5	4	4	3
G123.0	4	4	3	3	3	2	2
G124.0	3	2	2	2	2	1	1
G125.0	1	1	1	1	1	1	1
G126.0	1	1	1	1	1	1	1
G127.0	1	0	0	0	0	0	0
G128.0	0	0	0	0	0	0	0
G129.0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0
G131.0	0	0	0	0	0	0	0
G132.0	0	0	0	0	0	0	0
G133.0	0	0	0	0	0	0	0
G134.0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0
G136.0	0	0	0	0	0	0	0
G137.0	0	0	0	0	0	0	0
G138.0	0	0	0	0	0	0	0
G139.0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0
G141.0	0	0	0	0	0	0	0
G142.0	0	0	0	0	0	0	0
G143.0	0	0	0	0	0	0	0
G144.0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 13/18

	C 0.00	C 5.00	C 10.00	C 15.00	C 20.00	C 25.00	C 30.00	C 35.00	C 40.00	C 45.00	C 50.00	C 55.00	C 60.00
G146.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G147.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G148.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G149.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G151.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G152.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G153.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G154.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G156.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G157.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G158.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G159.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G161.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G162.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G163.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G164.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G166.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G167.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G168.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G169.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G170.0	0	0	0	1	1	1	1	1	1	1	1	1	1
G171.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G172.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G173.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G174.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G175.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G176.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G177.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G178.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G179.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1	1	1	1	1	1	1

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 14/18

	C 65.00	C 70.00	C 75.00	C 80.00	C 85.00	C 90.00	C 95.00	C 100.00	C 105.00	C 110.00	C 115.00	C 120.00	C 125.00
G146.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G147.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G148.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G149.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G151.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G152.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G153.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G154.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G156.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G157.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G158.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G159.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G161.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G162.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G163.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G164.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G166.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G167.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G168.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G169.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G170.0	1	1	1	1	0	0	0	1	1	1	1	1	1
G171.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G172.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G173.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G174.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G175.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G176.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G177.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G178.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G179.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1	1	1	1	1	1	1

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 15/18

	C 130.00	C 135.00	C 140.00	C 145.00	C 150.00	C 155.00	C 160.00	C 165.00	C 170.00	C 175.00	C 180.00	C 185.00	C 190.00
G146.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G147.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G148.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G149.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G151.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G152.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G153.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G154.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G156.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G157.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G158.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G159.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G161.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G162.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G163.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G164.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G166.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G167.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G168.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G169.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G170.0	1	1	1	1	1	1	1	1	0	0	0	0	0
G171.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G172.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G173.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G174.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G175.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G176.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G177.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G178.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G179.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1	1	1	1	1	1	1

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 16/18

	C 195.00	C 200.00	C 205.00	C 210.00	C 215.00	C 220.00	C 225.00	C 230.00	C 235.00	C 240.00	C 245.00	C 250.00	C 255.00
G146.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G147.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G148.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G149.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G151.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G152.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G153.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G154.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G156.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G157.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G158.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G159.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G161.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G162.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G163.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G164.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G166.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G167.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G168.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G169.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G170.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G171.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G172.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G173.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G174.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G175.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G176.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G177.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G178.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G179.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1	1	1	1	1	1	1

Luminaire

Code 5480
Name PUCK WALL ART LED

Measur.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Luminous Intensity Table cd Table 17/18

	C 260.00	C 265.00	C 270.00	C 275.00	C 280.00	C 285.00	C 290.00	C 295.00	C 300.00	C 305.00	C 310.00	C 315.00	C 320.00
G146.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G147.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G148.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G149.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G151.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G152.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G153.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G154.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G156.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G157.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G158.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G159.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G161.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G162.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G163.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G164.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G166.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G167.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G168.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G169.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G170.0	1	0	0	0	1	1	1	1	1	1	1	1	1
G171.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G172.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G173.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G174.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G175.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G176.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G177.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G178.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G179.0	1	1	1	1	1	1	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1	1	1	1	1	1	1

Luminaire

Code 5480
Name PUCK WALL ART LED

Measurem.

Code
Name 2700K CR190

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG	Asymmetrical

Luminous Intensity Table cd Table 18/18

	C 325.00	C 330.00	C 335.00	C 340.00	C 345.00	C 350.00	C 355.00
G146.0	0	0	0	0	0	0	0
G147.0	0	0	0	0	0	0	0
G148.0	0	0	0	0	0	0	0
G149.0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0
G151.0	0	0	0	0	0	0	0
G152.0	0	0	0	0	0	0	0
G153.0	0	0	0	0	0	0	0
G154.0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0
G156.0	0	0	0	0	0	0	0
G157.0	0	0	0	0	0	0	0
G158.0	0	0	0	0	0	0	0
G159.0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0
G161.0	0	0	0	0	0	0	0
G162.0	0	0	0	0	0	0	0
G163.0	0	0	0	0	0	0	0
G164.0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0
G166.0	0	0	0	0	0	0	0
G167.0	0	0	0	0	0	0	0
G168.0	0	0	0	0	0	0	0
G169.0	0	0	0	0	0	0	0
G170.0	1	1	1	1	1	0	0
G171.0	1	1	1	1	1	1	1
G172.0	1	1	1	1	1	1	1
G173.0	1	1	1	1	1	1	1
G174.0	1	1	1	1	1	1	1
G175.0	1	1	1	1	1	1	1
G176.0	1	1	1	1	1	1	1
G177.0	1	1	1	1	1	1	1
G178.0	1	1	1	1	1	1	1
G179.0	1	1	1	1	1	1	1
G180.0	1	1	1	1	1	1	1

Luminaire

Code 5480
Name PUCK WALL ART LED

Measurem.

Code
Name 2700K CRI90



Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG	Asymmetrical

Diam=580mm

Semiplanos C

180.0 ————— 0.0




270.0 ————— 90.0

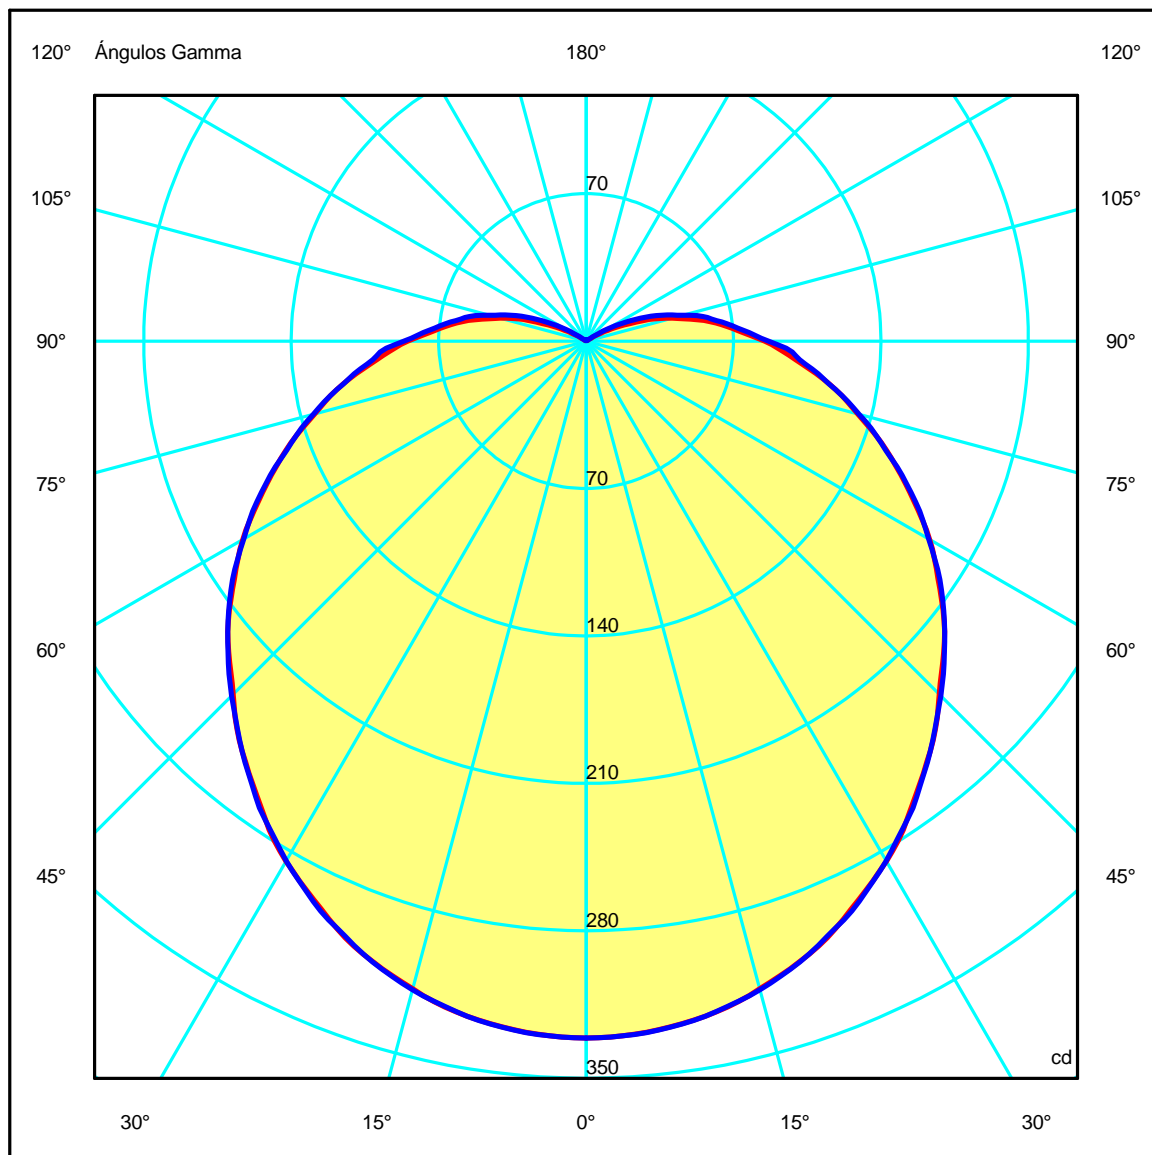

Luminaire
 Code 5480
 Name PUCK WALL ART LED
Measurem.
 Code
 Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG	Asymmetrical

Diam=580mm

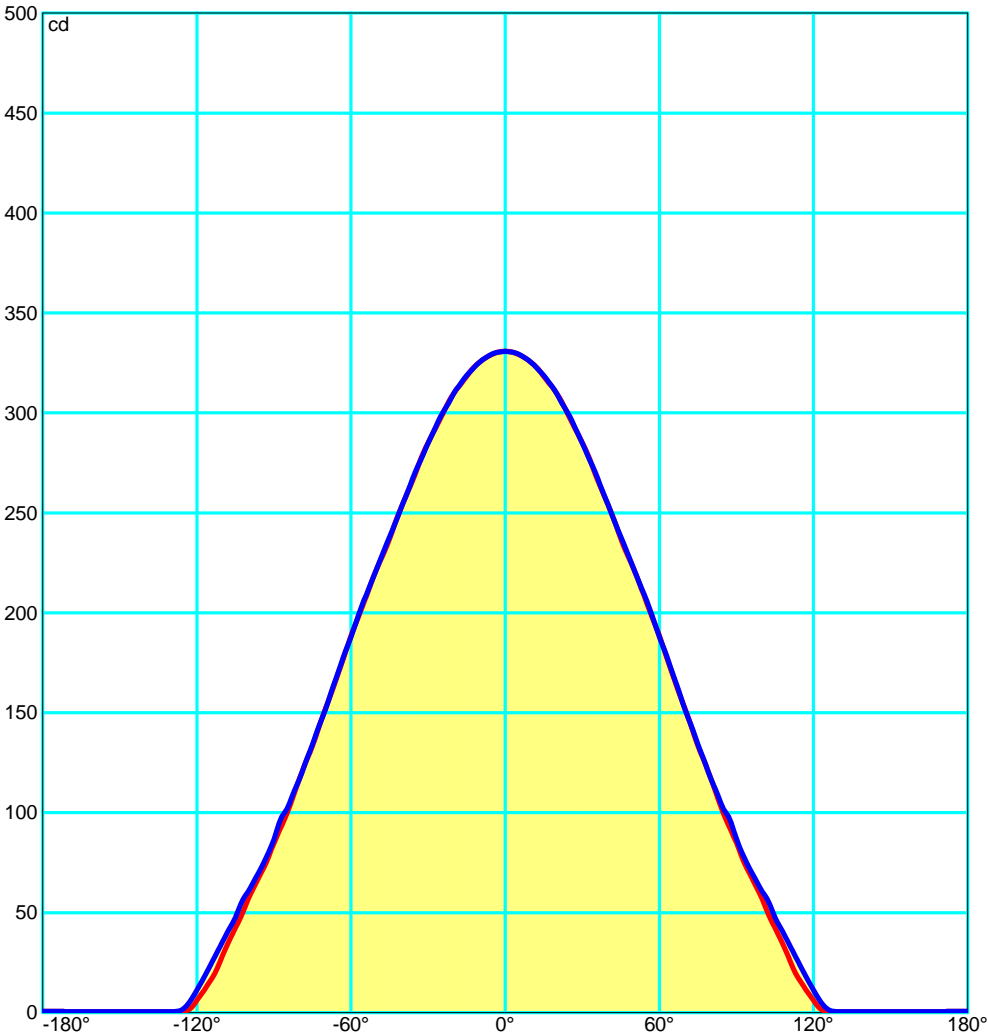

Luminaire

Code 5480
Name PUCK WALL ART LED

Measurem.

Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	Viewed Crosswise					Viewed Endwise				
x=2H y=2H	15.8	17.1	16.2	17.5	18.0	15.8	17.1	16.2	17.5	18.0
x=2H y=3H	18.0	19.2	18.5	19.7	20.2	18.0	19.2	18.5	19.7	20.2
x=2H y=4H	19.1	20.3	19.6	20.7	21.3	19.1	20.3	19.6	20.7	21.3
x=2H y=6H	20.3	21.3	20.8	21.8	22.4	20.3	21.3	20.8	21.8	22.4
x=2H y=8H	20.8	21.8	21.3	22.4	22.9	20.8	21.9	21.4	22.4	22.9
x=2H y=12H	21.4	22.4	21.9	22.9	23.5	21.4	22.4	21.9	22.9	23.5
x=4H y=2H	16.7	17.8	17.2	18.3	18.8	16.7	17.8	17.2	18.3	18.8
x=4H y=3H	19.1	20.1	19.6	20.6	21.2	19.1	20.1	19.6	20.6	21.2
x=4H y=4H	20.4	21.2	20.9	21.8	22.4	20.4	21.3	20.9	21.8	22.4
x=4H y=6H	21.7	22.4	22.2	23.0	23.7	21.7	22.5	22.2	23.0	23.7
x=4H y=8H	22.3	23.1	22.9	23.6	24.3	22.3	23.1	22.9	23.6	24.3
x=4H y=12H	23.0	23.6	23.6	24.2	24.9	23.0	23.7	23.6	24.3	24.9
x=8H y=4H	20.9	21.7	21.5	22.2	22.9	20.9	21.7	21.5	22.3	22.9
x=8H y=6H	22.5	23.1	23.1	23.7	24.4	22.5	23.1	23.1	23.7	24.4
x=8H y=8H	23.3	23.8	23.9	24.5	25.2	23.3	23.8	23.9	24.5	25.2
x=8H y=12H	24.1	24.6	24.8	25.2	26.0	24.1	24.6	24.8	25.3	26.0
x=12H y=4H	21.0	21.7	21.6	22.3	23.0	21.0	21.7	21.6	22.3	23.0
x=12H y=6H	22.7	23.2	23.3	23.9	24.6	22.7	23.2	23.3	23.9	24.6
x=12H y=8H	23.6	24.0	24.2	24.7	25.4	23.6	24.1	24.2	24.7	25.4


Luminaire
 Code 5480
 Name PUCK WALL ART LED
Measurem.
 Code
 Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.26	4.52	6.78	9.04	11.30	OC	2.28	4.56	6.84	9.12	11.40
OB	2.26	4.52	6.78	9.04	11.30	OD	2.28	4.56	6.84	9.12	11.40

	Luminous Intensities [cd]									
	0	5	15	25	35	45	55	65	75	85
OA	330.80	329.29	318.35	297.57	269.50	237.09	205.00	169.56	133.43	99.60
OB	330.80	329.29	318.35	297.57	269.50	237.09	205.00	169.56	133.43	99.60
OC	330.80	329.45	318.77	298.46	270.41	238.12	206.01	170.19	134.19	101.81
OD	330.80	329.45	318.77	298.46	270.41	238.12	206.01	170.19	134.19	101.81

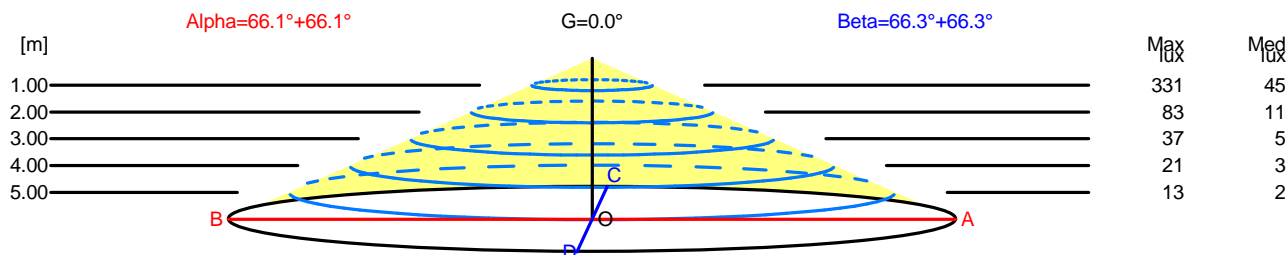

H[m]	D[m]	Max lux	Med lux	Alpha=66.1°+66.1°	G=0.0	
1.00	4.52	331	45			
2.00	9.04	83	11			
3.00	13.56	37	5			
4.00	18.08	21	3			
5.00	22.60	13	2			

H[m]	D[m]	Max lux	Med lux	Beta=66.3°+66.3°	G=0.0	
1.00	4.56	331	45			
2.00	9.12	83	11			
3.00	13.68	37	5			
4.00	18.25	21	3			
5.00	22.81	13	2			

Luminaire
Code 5480
Name PUCK WALL ART LED
Measur.
Code
Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG Asymmetrical	

Flujo Total=1366.61 Flujo Luminaria=1366.61

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.24	0.31	0.38	0.44	0.50	0.58	0.64	0.68	0.74	0.78	0.87	0.92
RC	7	7	7	7	7	7	7	7	7	7	7	7


Flujo Zonal por 1000 Lúmenes

Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	23	89	189	313	448	582	705	809	889	946	982	997	999	1000	1000	1000	1000	1000

Códigos de Flujo C.I.E.
37 65 86 89 100

C.I.E. 7
D DIN 5040 B21
F UTE 0.89 H + 0.11 T
B NBN BZ 6
RN 11.07445 %
BLF 1.0

LOR 100.00000 %
ULOR 11.07445 %
DLOR 88.92555 %
UFF 11.07445 %
DFF 88.92555 %
FFR 12.45363 %

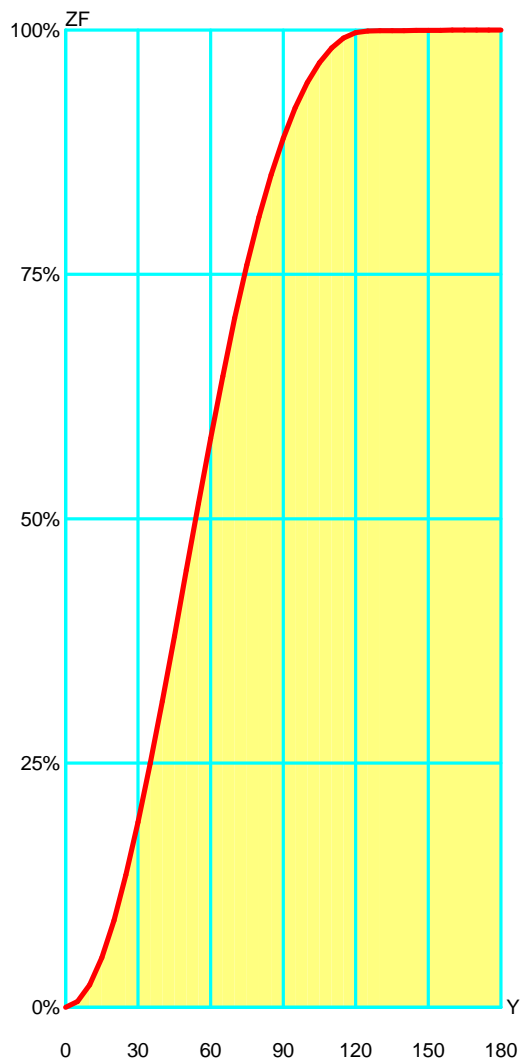

Flujo Zonal				
Gamma °	Flujo	Suma lm	Flujo [%]	Suma [%]
0°	0.00	0.00	0.00%	0.00 %
5°	5.77	5.77	0.58 %	0.58 %
10°	17.14	22.92	1.71 %	2.29 %
15°	27.95	50.87	2.80 %	5.09 %
20°	37.89	88.76	3.79 %	8.88 %
25°	46.61	135.37	4.66 %	13.54 %
30°	53.99	189.36	5.40 %	18.94 %
35°	59.76	249.12	5.98 %	24.91 %
40°	63.95	313.07	6.40 %	31.31 %
45°	66.57	379.64	6.66 %	37.96 %
50°	67.93	447.56	6.79 %	44.76 %
55°	68.00	515.56	6.80 %	51.56 %
60°	66.54	582.11	6.65 %	58.21 %
65°	63.60	645.70	6.36 %	64.57 %
70°	59.43	705.14	5.94 %	70.51 %
75°	54.52	759.66	5.45 %	75.97 %
80°	49.02	808.68	4.90 %	80.87 %
85°	43.24	851.93	4.32 %	85.19 %
90°	37.33	889.26	3.73 %	88.93 %
95°	31.29	920.54	3.13 %	92.05 %
100°	25.62	946.16	2.56 %	94.62 %
105°	20.53	966.70	2.05 %	96.67 %
110°	15.10	981.79	1.51 %	98.18 %
115°	10.09	991.88	1.01 %	99.19 %
120°	5.42	997.30	0.54 %	99.73 %
125°	1.76	999.06	0.18 %	99.91 %
130°	0.21	999.27	0.02 %	99.93 %
135°	0.13	999.40	0.01 %	99.94 %
140°	0.12	999.52	0.01 %	99.95 %
145°	0.10	999.63	0.01 %	99.96 %
150°	0.09	999.72	0.01 %	99.97 %
155°	0.08	999.80	0.01 %	99.98 %
160°	0.07	999.87	0.01 %	99.99 %
165°	0.05	999.92	0.01 %	99.99 %
170°	0.04	999.96	0.00 %	100.00 %
175°	0.03	999.99	0.00 %	100.00 %
180°	0.01	1000.00	0.00 %	100.00 %

Luminaire
 Code 5480
 Name PUCK WALL ART LED
Measurem.
 Code
 Name 2700K CRI90

Luminaire Flux	1366.61 lm	Luminaire Power	25.61 W	Efficacy	53.37 lm/W	Efficiency	100.00%
Sources Flux	1366.61 lm	Maximum value	330.80 cd	Position	C=0.00 G=0.00	CG	Asymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

